


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

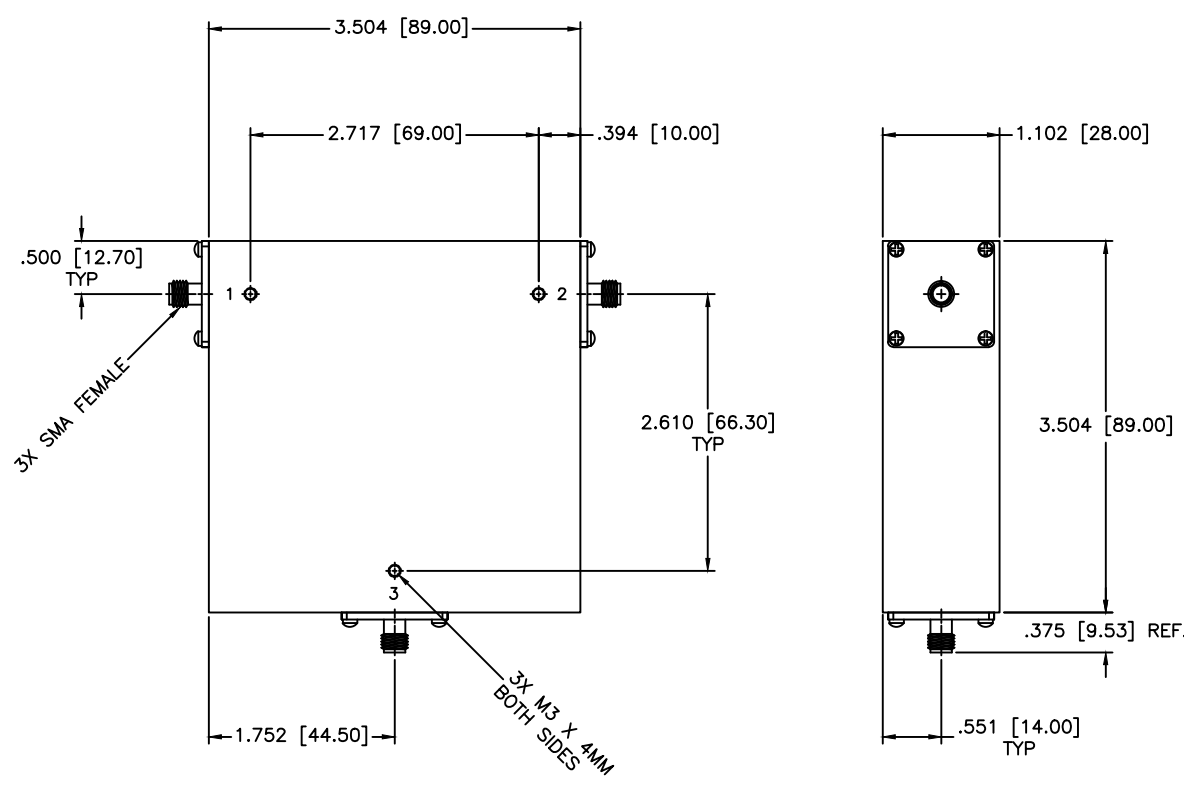

**SPECIFICATIONS**

Frequency Range: 800–2500 MHz  
 Isolation: 12dB Min.  
 Insertion loss: 1.0dB Max.  
 VSWR: 1.70:1 Max.  
 Power: 25W Avg, 250W Peak  
 Operating Temperature: +10°C to +40°C

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6110 http://www.mcli.com		SCALE: N/A
DRAWING TITLE:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .015 ANGLE: ± 1/2°		DRAWING TITLE: COAXIAL CIRCULATOR		SHEET: N/A
PART NO.:		CS-130		CAGE CODE: OD2L5		SIZE: N/A
DRAWING:		Paiboon Luekhamhan DATE: 08-30-2010		REV: N/A DO NOT SCALE THE DRAWING		DWG NO. 85041
APPROVED:		T. Nguyen DATE: 08-30-2010				

