


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

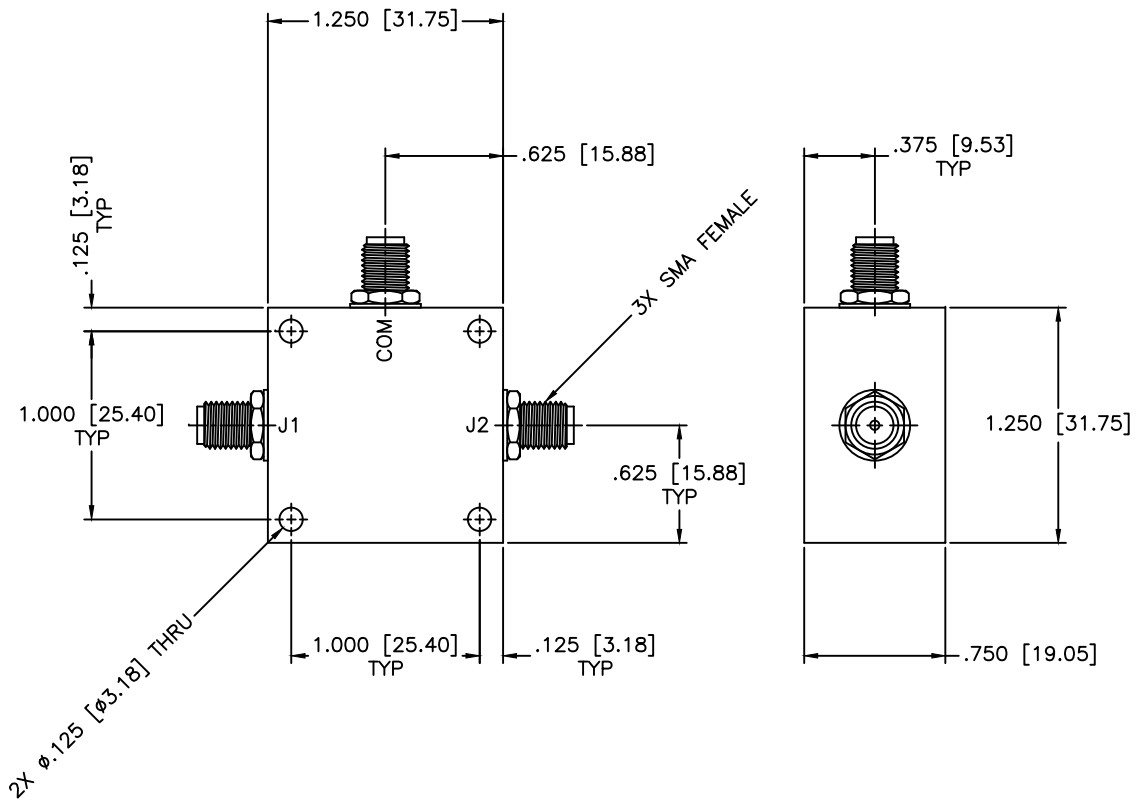

SPECIFICATIONS

- Frequency Range: 200–2500 MHz
- Isolation: 20dB Min.
- VSWR: 1.50:1 Max.
- Insertion Loss: 1.6dB Max.
- Amplitude Balance: ±0.4dB Max.
- Phase Balance: ±8 Deg. Max.
- Input Power Rating: 1Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO.: PL2-11		
DATE: 12-22-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 12-22-1997		
THIRD ANGLE PROJECTION		SIZE: A		
		REV: N/A		
		DWG NO.: 82078		
DO NOT SCALE THE DRAWING				