


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

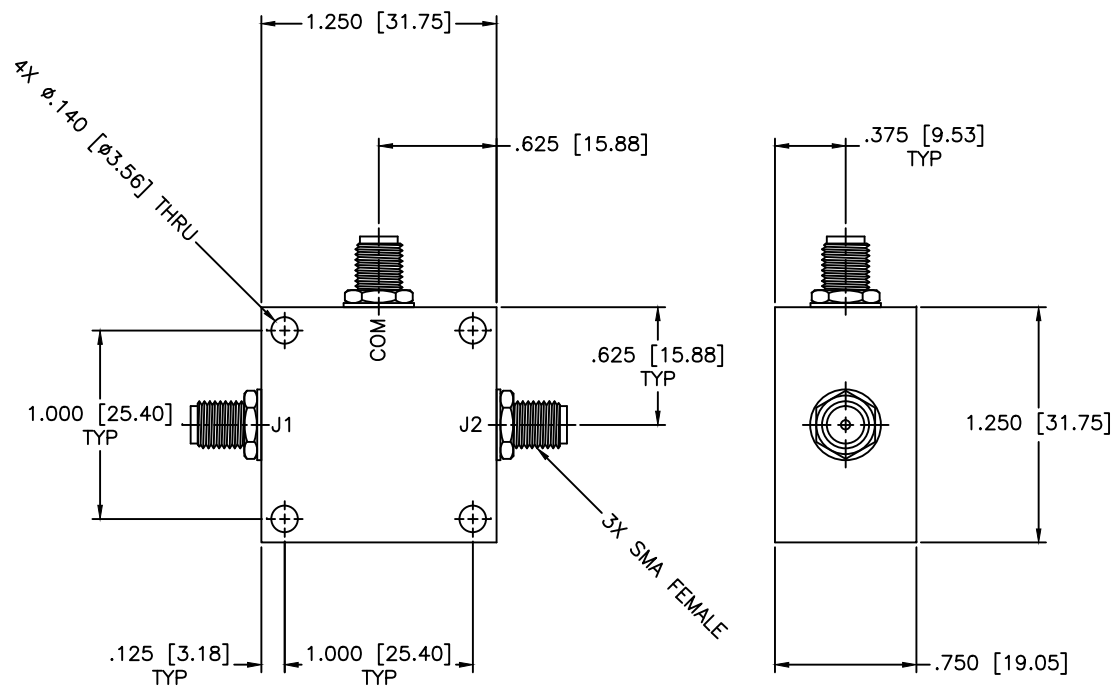

**SPECIFICATIONS**

Frequency Range: 10–2500 MHz  
 Isolation: 22dB Min.  
 VSWR: 1.50:1 Max.  
 Insertion Loss: 1.8dB Max.  
 Amplitude Balance: ±0.4dB Max.  
 Phase Balance: ±6 Deg. Max.  
 Input Power Rating: 1 Watt Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) 	PART NO. <b>PL2-13</b>	
DRAWN:	DATE:	CAGE CODE: <b>OD2L5</b> SIZE: <b>A</b> REV: <b>N/A</b> DO NOT SCALE THE DRAWING	DWG NO. <b>84495</b>	
APPROVED:	DATE:			

DRAWN: Paiboon Luekhamhan  
 DATE: 05-20-2009  
 APPROVED: T. Nguyen  
 DATE: 05-20-2009