


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

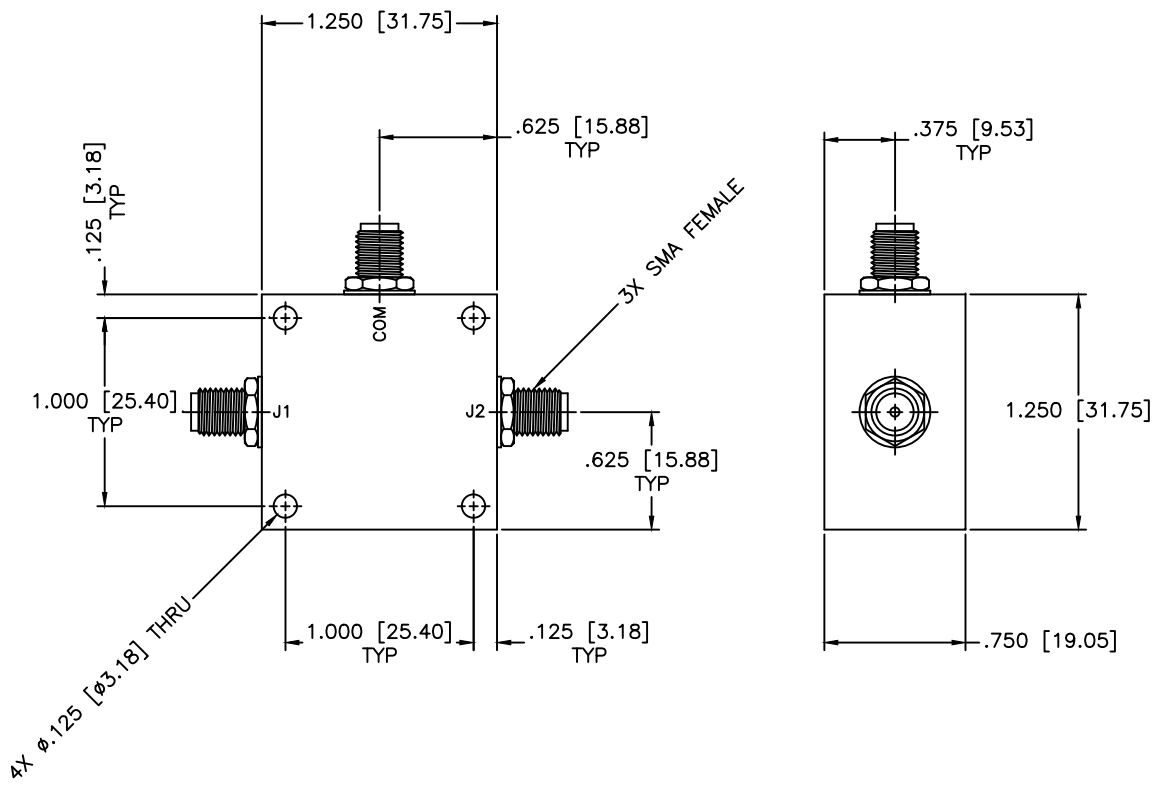

SPECIFICATIONS

Frequency Range: 2–500 MHz
 Isolation: 28dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 0.7dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-14-2007
APPROVED: T. Nguyen	DATE: 03-14-2007



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
2-WAY POWER DIVIDER

PART NO.
PL2-22

CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 84045
DO NOT SCALE THE DRAWING			

