


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

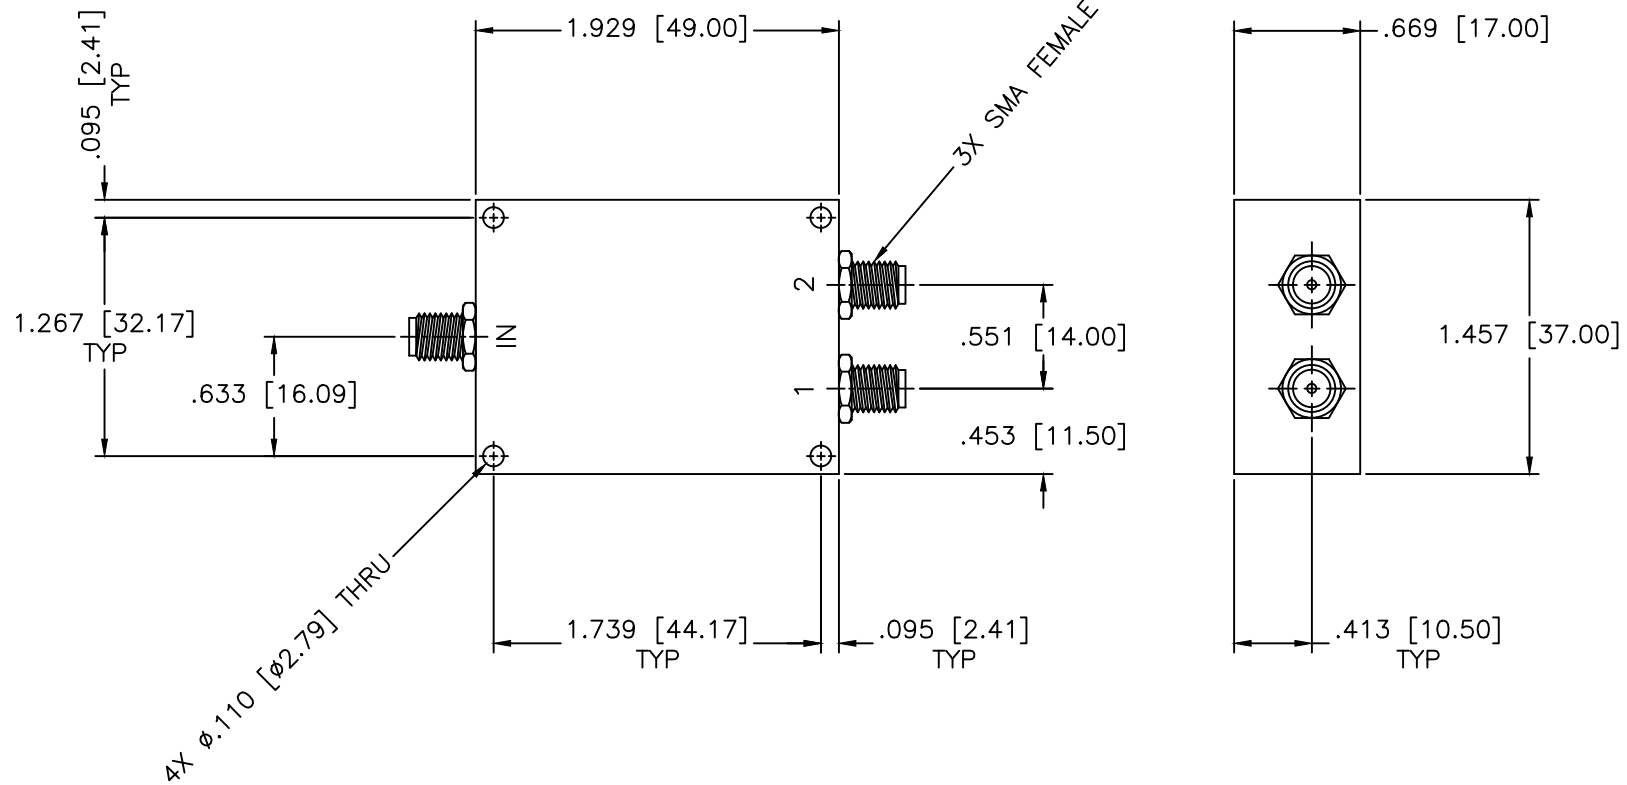

SPECIFICATIONS

Frequency Range: 20–1000 MHz
 Insertion Loss: 1.0dB Max.
 Isolation: 20dB Min.
 VSWR: 1.30:1 Max.
 Forward Power (CW): 0.5 Watt Max.
 Amplitude Balance: ± 0.4 Max.
 Phase Balance: ± 3 Deg. Max.
 Impedance: 50 Ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luexhamhan		PART NO. PL2-32		
DATE: 03-06-2013	DATE: 03-06-2013	CAGE CODE: OD2L5	SIZE: N/A	REV: A
APPROVED: T. Nguyen		DO NOT SCALE THE DRAWING		DWG NO. 84534

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)