


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

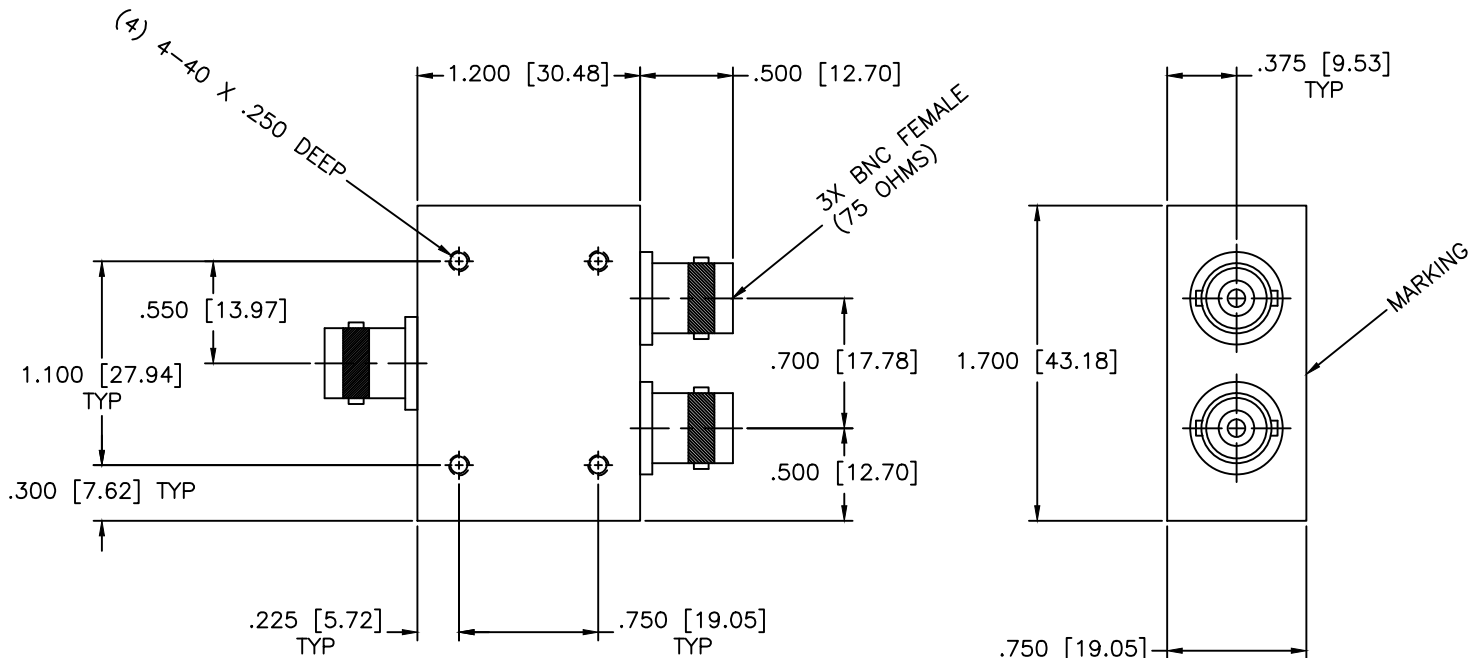

SPECIFICATIONS

Frequency Range: 5-1000 MHz
 Isolation: 18dB Min.
 Insertion Loss: 1.1dB Max.
 Amplitude Balance: ±0.3dB Max.
 VSWR: 1.20:1 Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 75 Ohm
 Input Power: 0.5 Watt Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 2-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-12-2010		PART NO.: PL2-36-S-75/BF	
APPROVED: T. Nguyen		DATE: 04-12-2010		CAGE CODE: OD2L5	SIZE: A REV: A DWG NO.: 84751 DO NOT SCALE THE DRAWING

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

