


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

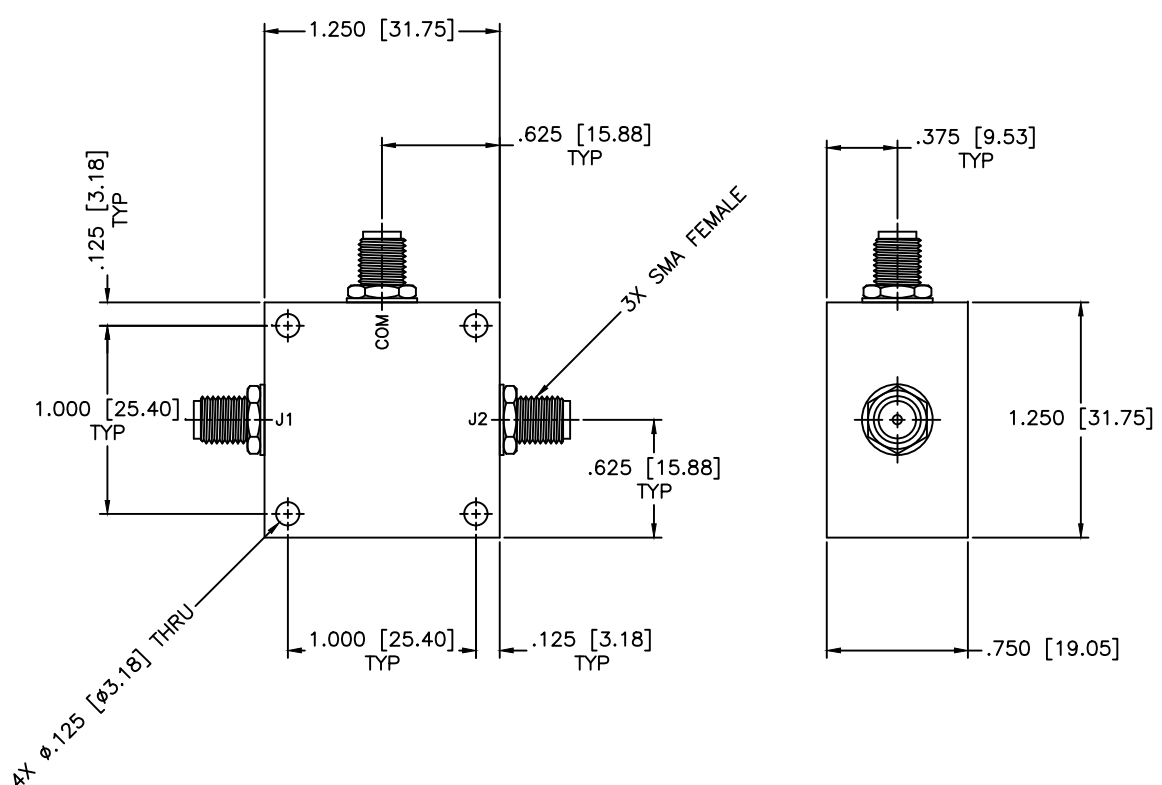

**SPECIFICATIONS**

Frequency Range: 20–1000 MHz  
 Isolation: 30dB Min.  
 VSWR: 1.30:1 Max.  
 Insertion Loss: 1.3dB Max.  
 Amplitude Balance: ±0.4dB Max.  
 Phase Balance: ±5 Deg. Max.  
 Power: 1 Watt

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 12-22-1997
APPROVED: T. Nguyen	DATE: 12-22-1997

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>			
PART NO. <b>PL2-6</b>			
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 80129
DO NOT SCALE THE DRAWING			

