


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

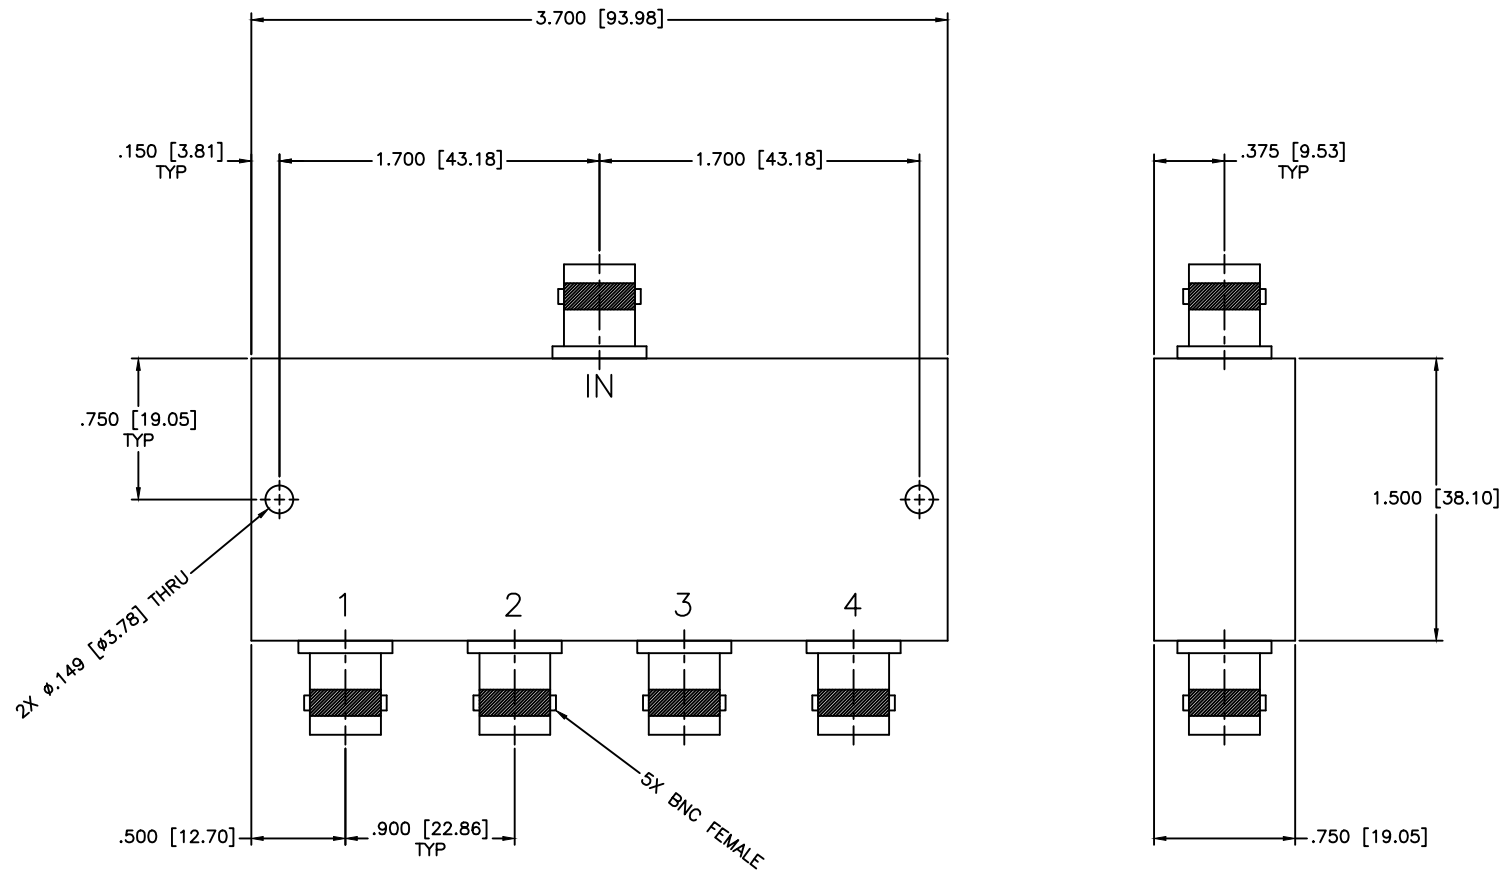

SPECIFICATIONS

- Frequency Range: 70–140 MHz
- Isolation: 20dB Min.
- Insertion Loss: 1.0dB Max.
- Amplitude Balance: ±0.2dB Max.
- Phase Balance: ±1.5 Deg. Max.
- VSWR: 1.20:1 Max.
- Impedance: 75 Ohms
- Power Input: 0.5 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	4-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DATE:	PART NO.		
THIRD ANGLE PROJECTION	DATE:	PL4-21-S-75/BF		
DRAWN:	DATE:	CAGE CODE:	SIZE:	REV:
Pai boon Luekhamhan	09-04-2001	OD2L5	A	N/A
APPROVED:	DATE:	DO NOT SCALE THE DRAWING		DWG NO.
T. Nguyen	09-04-2001			84747