


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

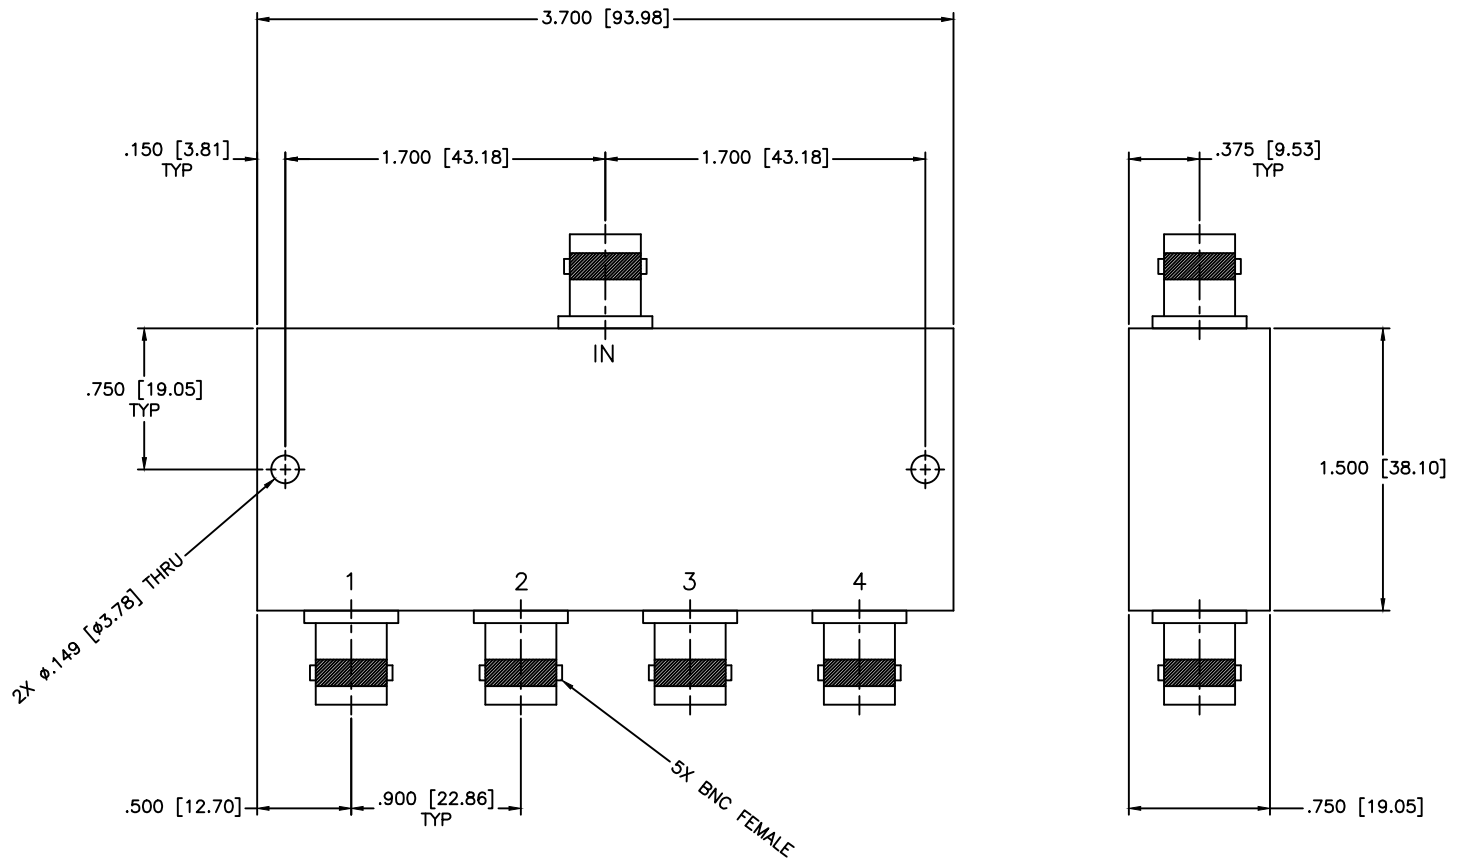

**SPECIFICATIONS**

Frequency Range: 10–750 MHz  
 Isolation: 15dB Min.  
 Insertion Loss: 2.0dB Max.  
 Amplitude Balance: ±0.9dB Max.  
 Phase Balance: ±6 Deg. Max.  
 VSWR: 1.32:1 Max.  
 Impedance: 75 Ohms  
 Power Input: 0.5 Watt Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	4-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan DATE: 04-02-2010		PART NO. PL4-28-75/BF	SHEET:	N/A
APPROVED: T. Nguyen DATE: 04-02-2010		CAGE CODE: OD2L5 SIZE: A REV: N/A DWG NO.: 84749	DO NOT SCALE THE DRAWING	

PROPRIETARY NOTICE:  
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
 PERMISSION FROM MICROWAVE COMMUNICATIONS  
 LABORATORIES INC. (MCLI)  
 THIRD ANGLE PROJECTION