


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

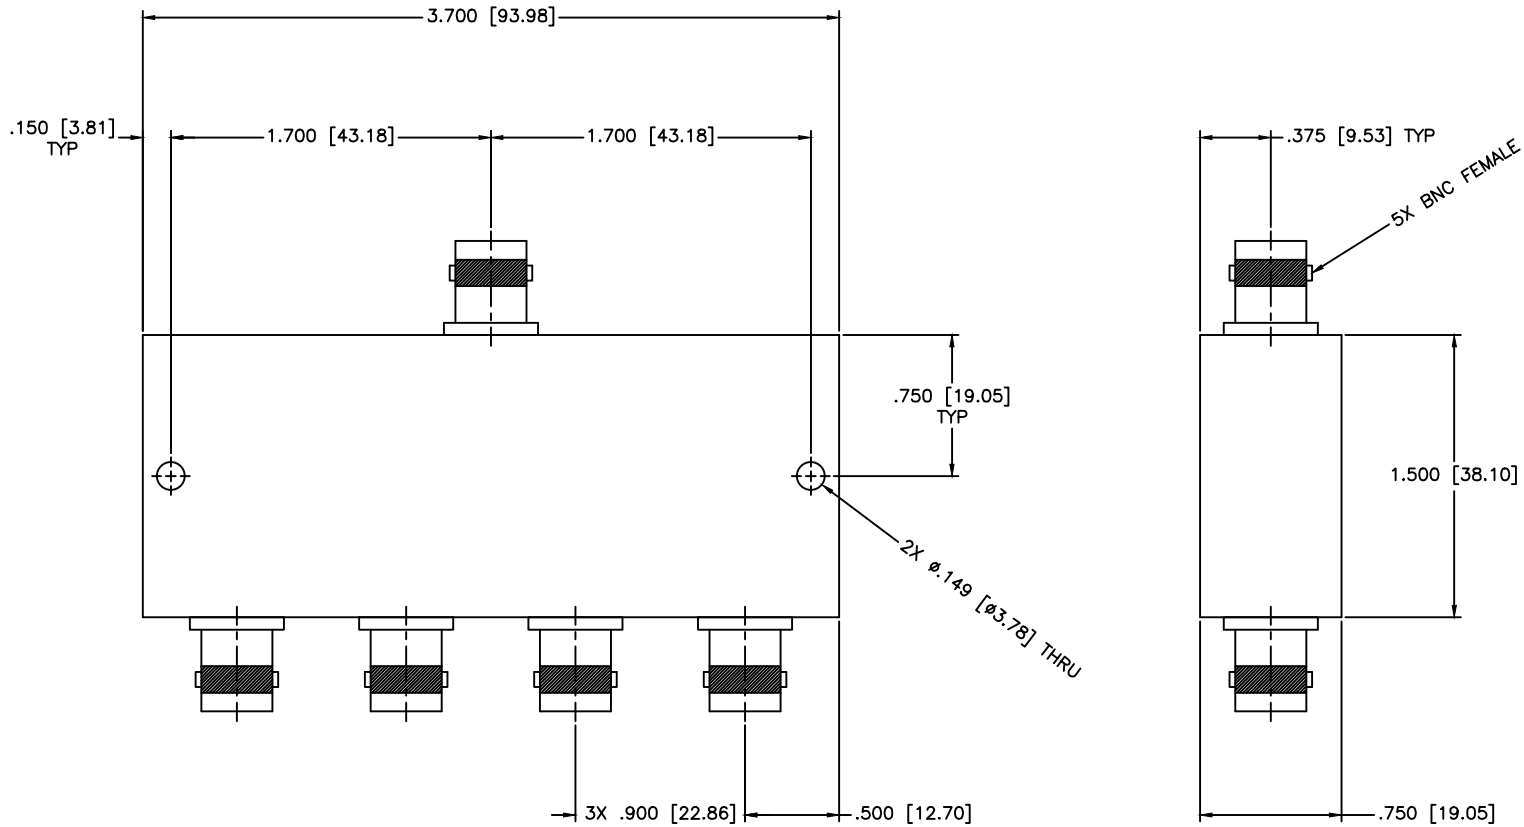

SPECIFICATIONS

Frequency Range: 10–1000 MHz
 Isolation: 14dB Min.
 Insertion Loss: 0.8dB Typ. / 2.0dB Max.
 Amplitude Balance: 0.9dB Max.
 Phase Balance: ± 12 Deg. Max.
 VSWR: 1.40:1 Max.
 Impedance: 75 Ohms
 Power Input: 1 Watt Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 4-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-02-2010		PART NO. PL4-29-75/BF	
APPROVED: T. Nguyen		DATE: 04-02-2010		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 84750 DO NOT SCALE THE DRAWING

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

