


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

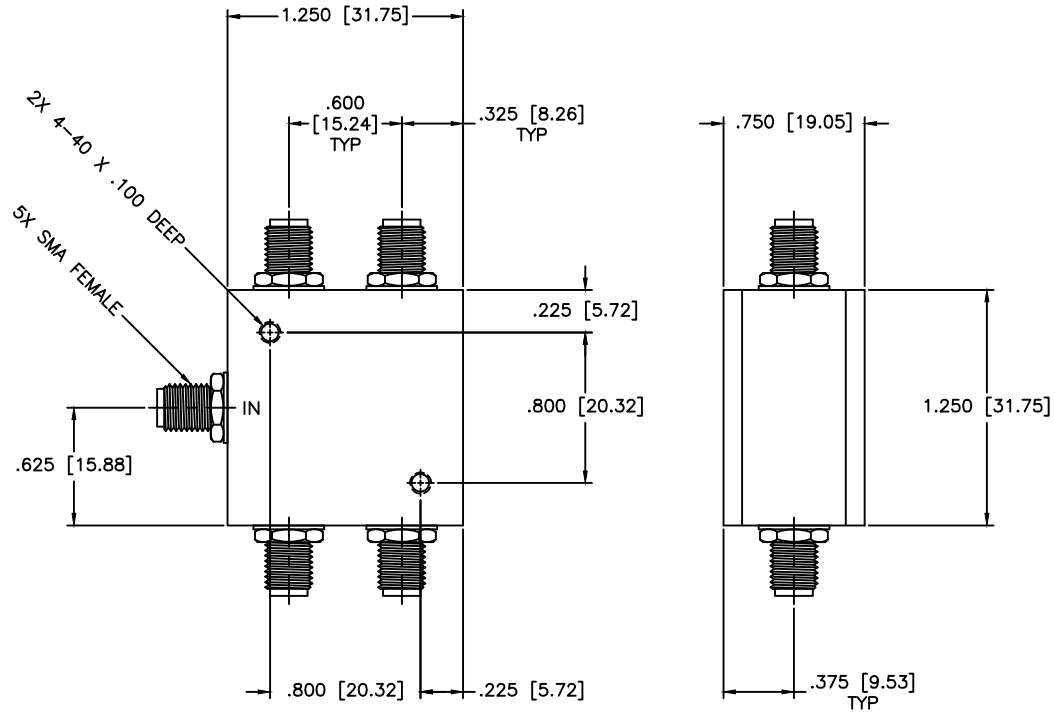

SPECIFICATIONS

Frequency Range: 5–2000 MHz
 Insertion Loss: 2.8dB Max.
 Input Power: 1 Watt
 Impedance: 50 Ohms
 Isolation: 16dB Min.
 Phase Balance: ± 6 Deg. Max.
 Amplitude Balance: ± 0.6 dB Max.
 Operating Temperature: -20°C to $+70^{\circ}\text{C}$

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL4-4		
DATE: 03-20-2008		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
APPROVED: T. Nguyen		DATE: 03-20-2008		CAGE CODE: OD2L5
THIRD ANGLE PROJECTION		SIZE: A	REV: A	DWG NO. 82799
		DO NOT SCALE THE DRAWING		