


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

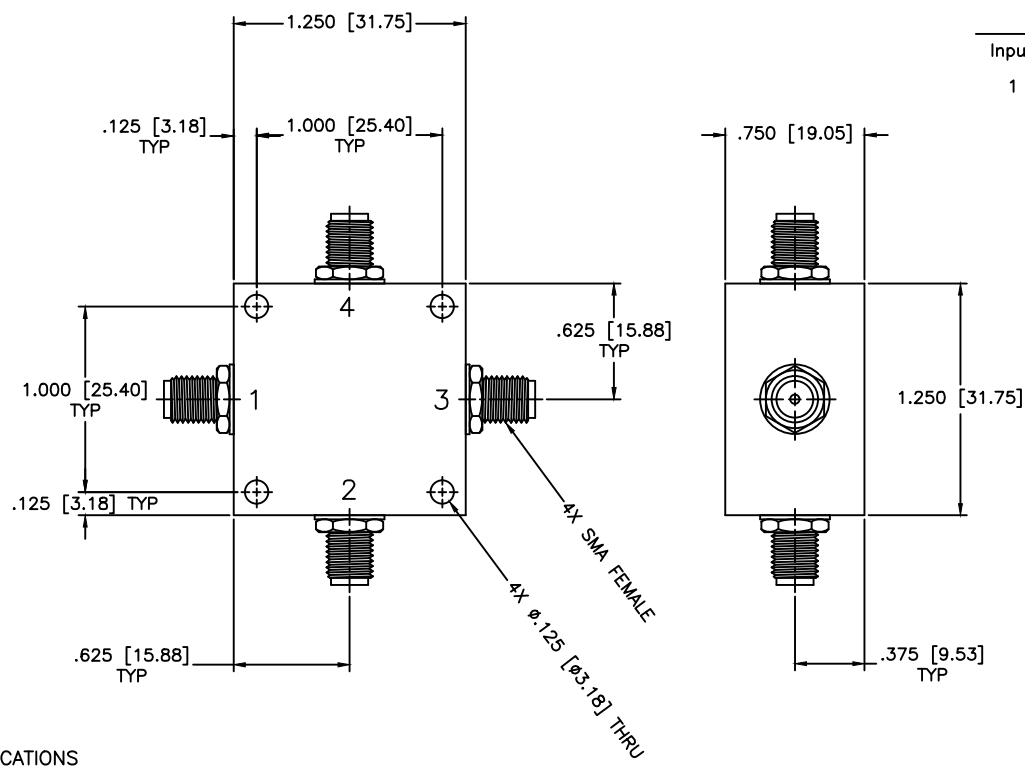

PORT CONFIGURATION			
Input	90° Out	Isolated	0° Out
1	2	3	4

SPECIFICATIONS

- Frequency Range: 20–40 MHz
- Isolation: 20dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 0.6dB Max.
- Amplitude Balance: ±0.6dB Max.
- Phase Balance: ±2 Deg. Max.
- Operating Temperature: -55°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A	
DRAWING TITLE:		90° HYBRID, OCTAVE				
PART NO.:		BL-2				
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:	REV:	DWG NO.:
APPROVED:	DATE:		OD2L5	A	N/A	80707
		THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		

DRAWN: Paboon Luekhamhan
 DATE: 11-30-1997
 APPROVED: T. Nguyen
 DATE: 11-30-1997