


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

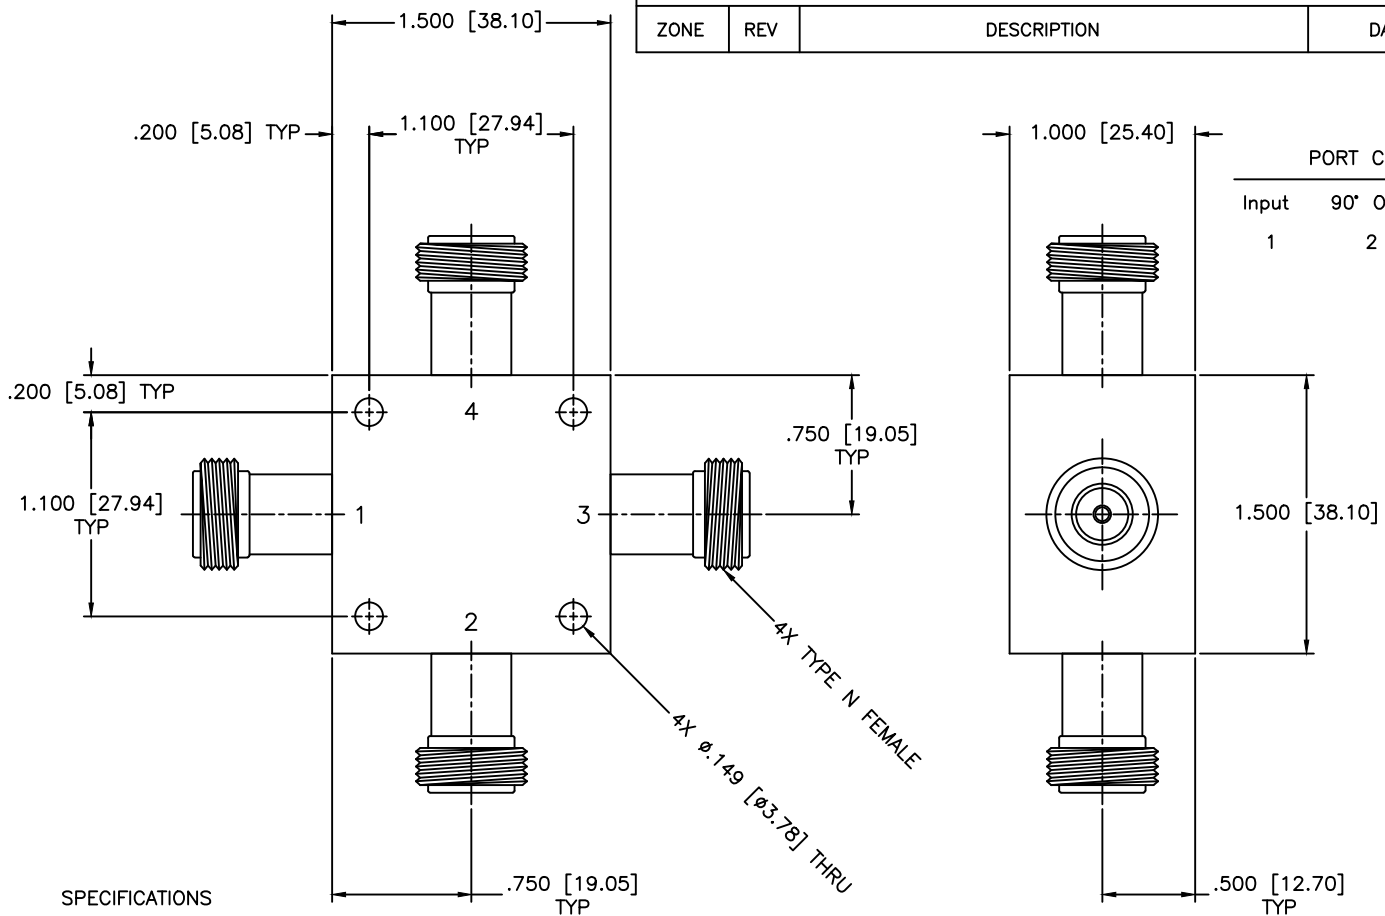

PORT CONFIGURATION				
Input	90° Out	Isolated	0° Out	
1	2	3	4	

SPECIFICATIONS

- Frequency Range: 20–40 MHz
- Isolation: 20dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 0.6dB Max.
- Amplitude Balance: ±0.6dB Max.
- Phase Balance: ±2 Deg. Max.
- Operating Temperature: -55°C to +85°C

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	11-30-1997
APPROVED:	DATE:
T. Nguyen	11-30-1997

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	90° HYBRID, OCTAVE
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	BL-2/NF	
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	A	N/A	80718	
DO NOT SCALE THE DRAWING				

