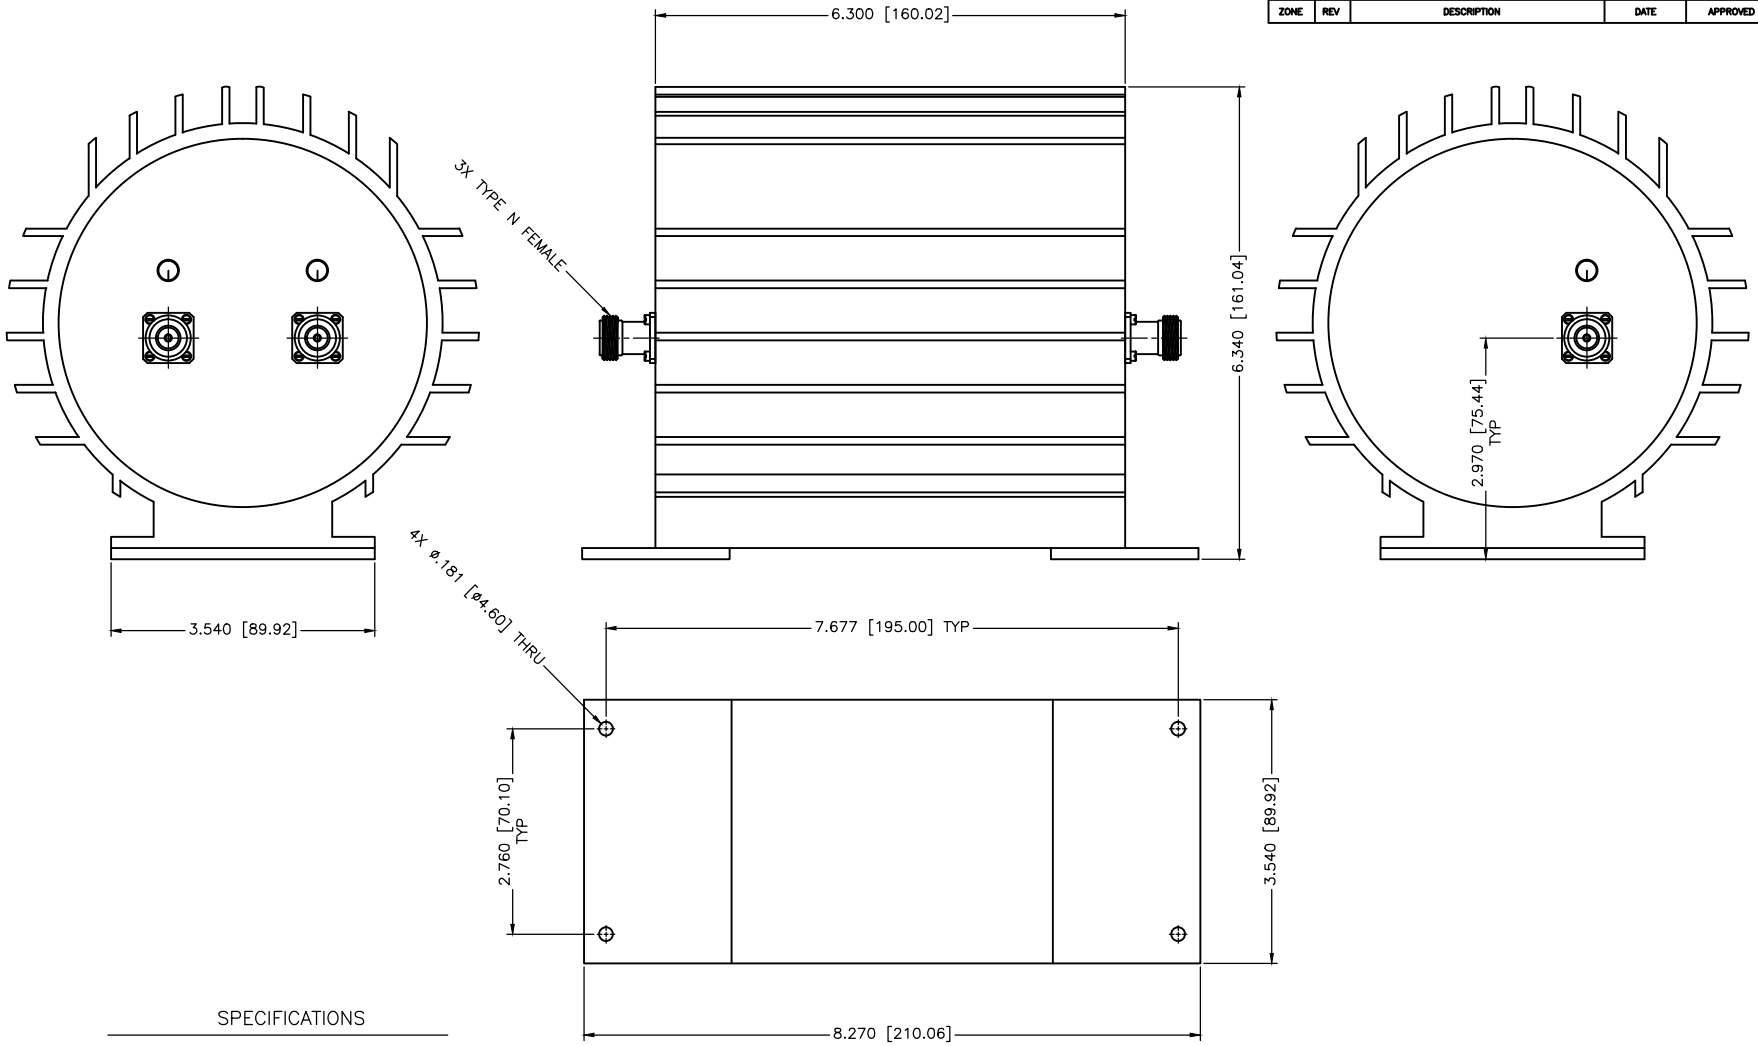

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range:	415–435 MHz
Isolation:	20dB Min.
Insertion loss:	0.50dB Max.
VSWR:	1.20:1 Max.
Power Handling:	500W CW
Operating Temperature:	−10°C to +70°C

MATERIAL:

DRAWN: Paiboon Luekhamhan DATE: 08-18-2008

APPROVED: T. Nguyen DATE: 08-18-2008

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A

SHEET: N/A

DRAWING TITLE: HIGH POWER CIRCULATOR

PART NO. CSH-13

CAGE CODE: 0D2L5

SIZE: N/A

REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 83841