


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

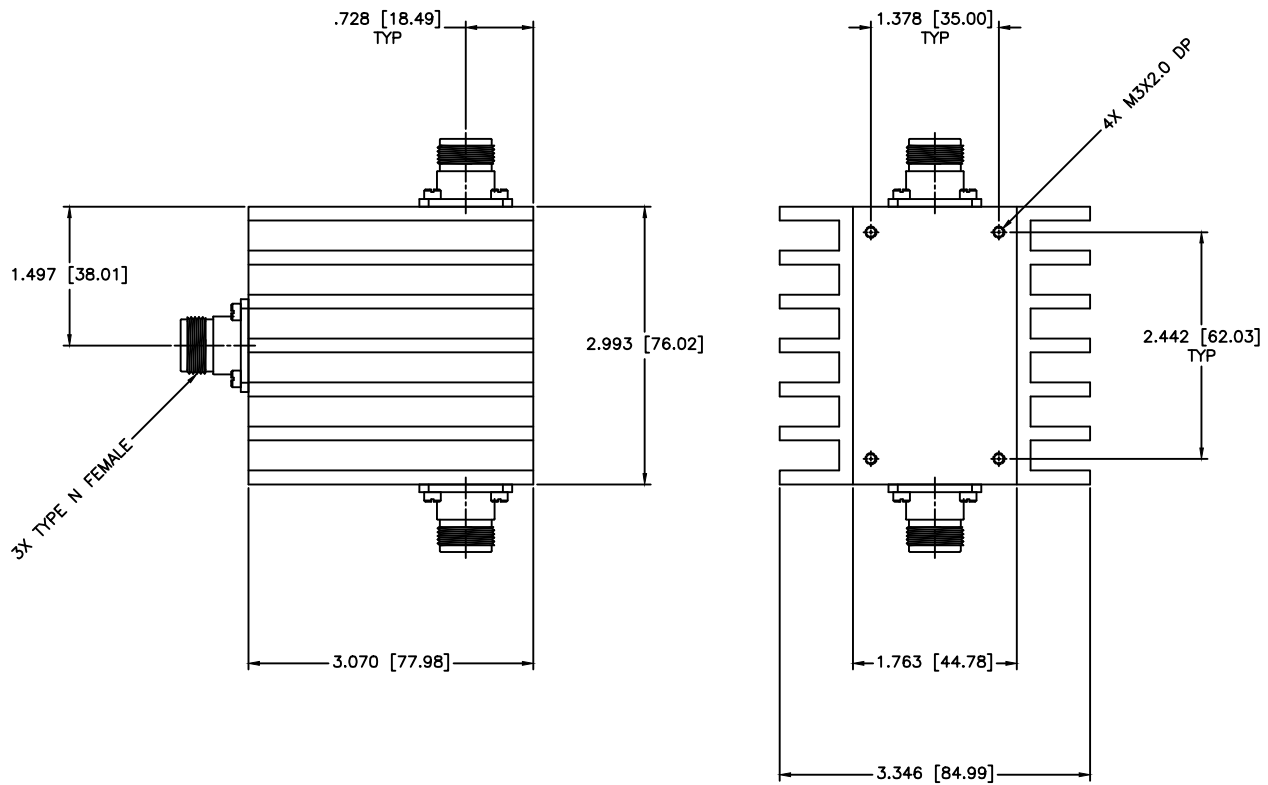

SPECIFICATIONS

Frequency Range: 1200–1500 MHz
 Reverse Isolation: 20dB Min.
 Insertion loss: 0.50dB Max.
 VSWR: 1.20:1 Max.
 Forward Power: 500W CW, 2500W FF Peak
 Operating Temperature: -10°C to +65°C

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: LUMPED ELEMENT COAXIAL CIRCULATOR	
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: CSH-15	
DRAWN: Paiboon Luekhamhan	DATE: 06-12-2013	 THIRD ANGLE PROJECTION	CAGE CODE:	SIZE: C
APPROVED: T. Nguyen	DATE: 06-12-2013		REV: N/A	DWG NO.: 86286
			DO NOT SCALE THE DRAWING	