


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

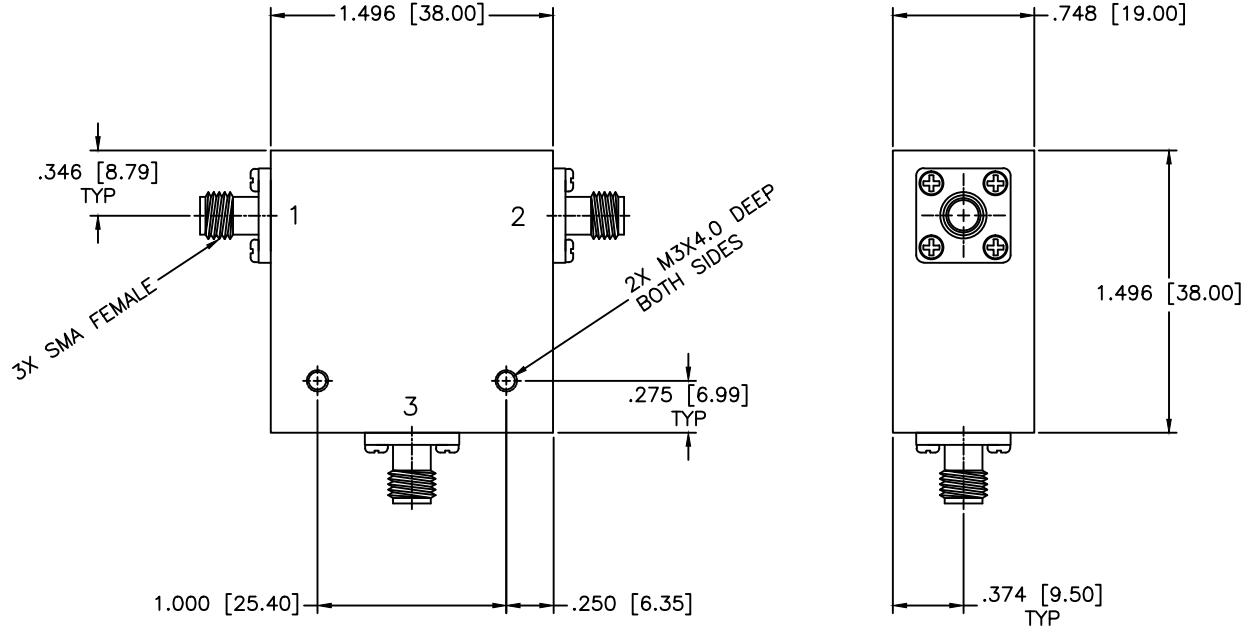

**SPECIFICATIONS**

- Frequency Range: 1–1.12 GHz
- Isolation: 20dB Min.
- Insertion loss: 0.3dB Max.
- VSWR: 1.50:1 Max.
- Power Avg: 50 Watts
- Power Peak: 100 Watts
- Operating Temperature: -0°C to +50°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>COAXIAL CIRCULATOR</b>	
DRAWN: Paiboon Luekahamhan		PART NO.: CSN-24	
DATE: 09-14-2005	DATE: 09-14-2005	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 09-14-2005	REV: N/A	DWG NO.: 84882
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	