


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

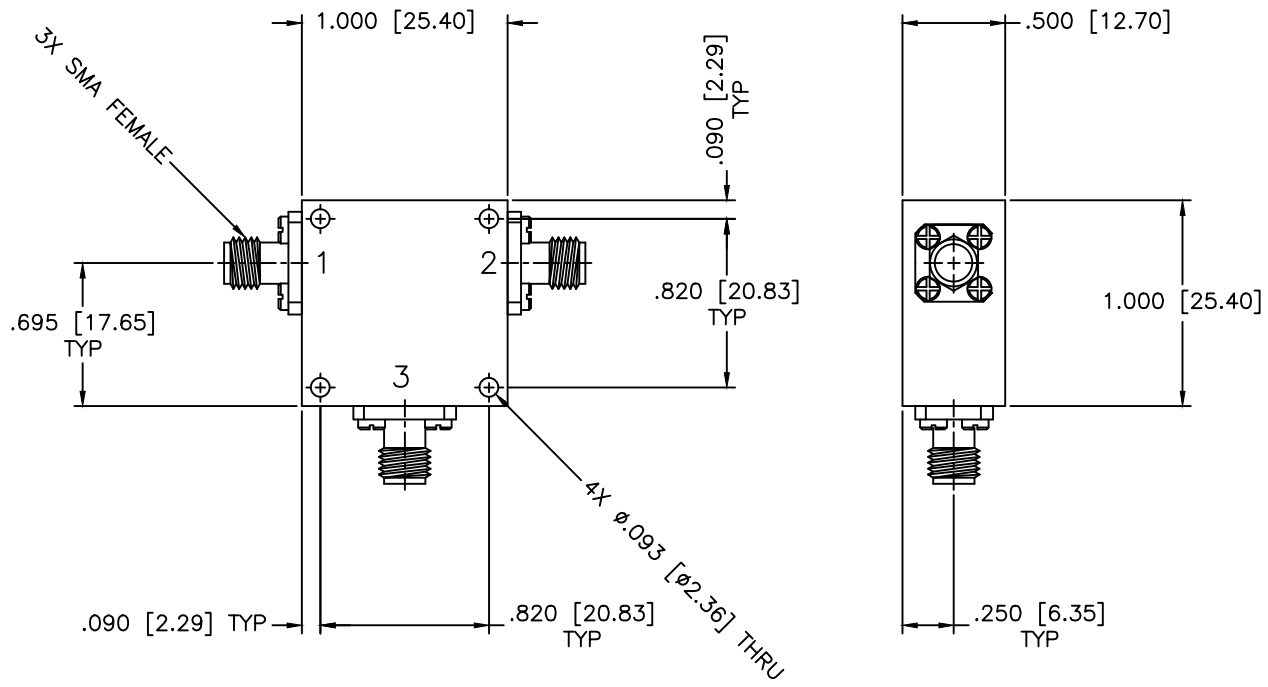

SPECIFICATIONS AT 25±5°C

Frequency Range: 1.2–1.6 GHz

Isolation: 18dB Min.

Insertion loss: 0.60dB Max.

VSWR: 1.35:1 Max.

Specifications From 0°C to +60°C

Isolation: 16dB Min.

Insertion loss: 0.70dB Max.

VSWR: 1.40:1 Max.

Circulator Power: 50 Watts

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 09-03-1999
APPROVED: T. Nguyen	DATE: 09-03-1999



MICROWAVE COMMUNICATIONS LABORATORIES INC.  
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
TEL: (727) 344-6254 FAX: (727) 381-6116  
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:  
TOLERANCES  
IN (INCHES) OR [mm] (MILLIMETERS)  
FRACTIONS: ± 1/64  
DECIMALS: ±.01 ±.005  
ANGLE: ±1/2°

DRAWING TITLE:  
**COAXIAL CIRCULATOR**

PART NO.  
**CSN-26**

PROPERTY NOTICE:  
THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
PERMISSION FROM MICROWAVE COMMUNICATIONS  
LABORATORIES INC. (MCLI)

CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	N/A	84357
DO NOT SCALE THE DRAWING			

