


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

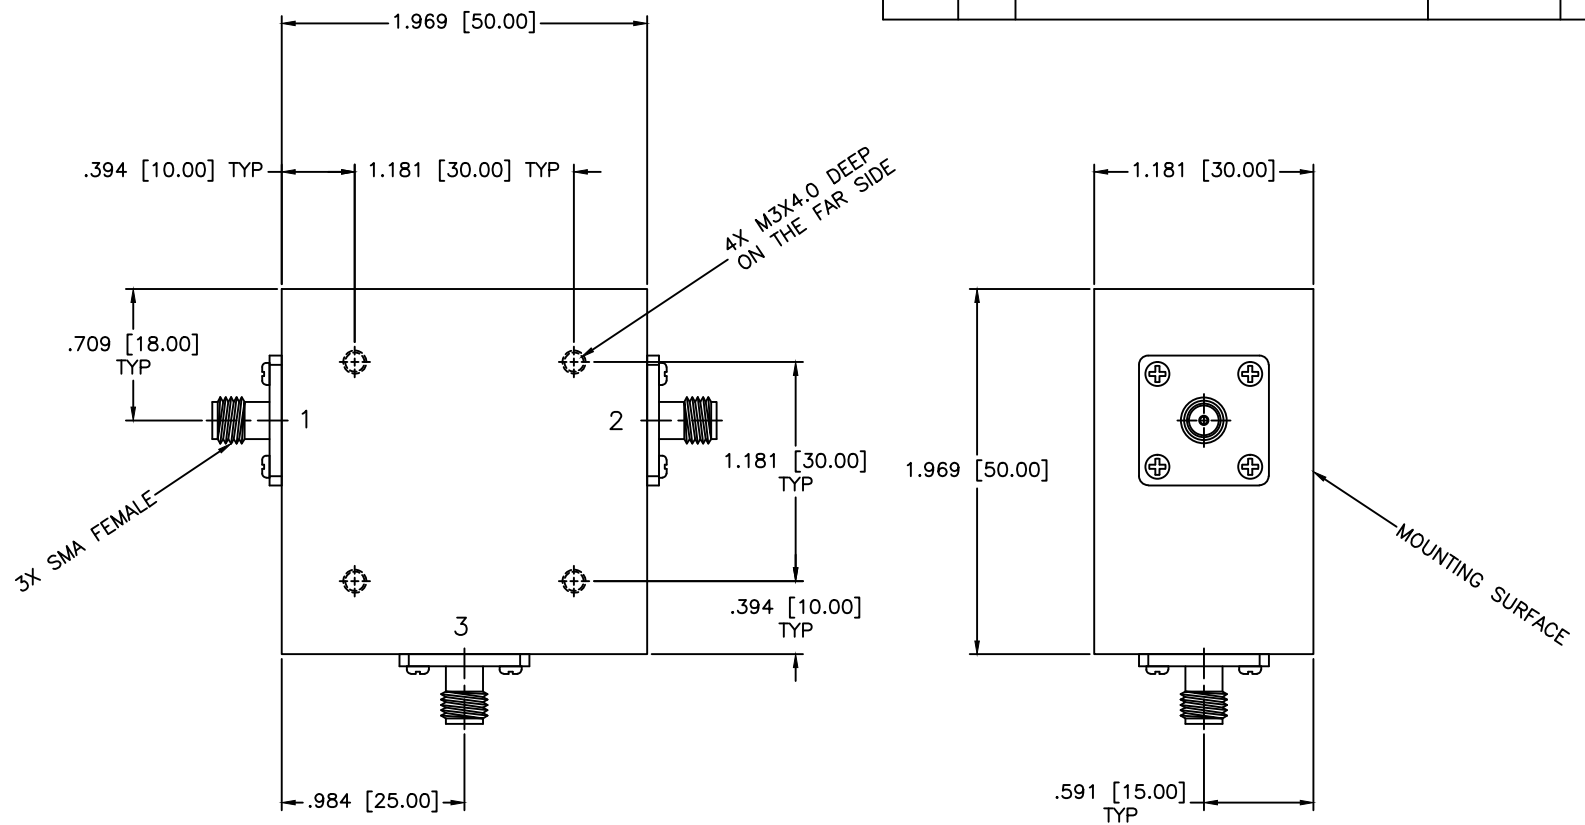

**SPECIFICATIONS**

- Frequency Range: 260–300 MHz
- Isolation: 20dB Min.
- Insertion loss: 0.5dB Max.
- VSWR: 1.25:1 Max.
- Power Avg: 50 Watts
- Operating Temperature: -5°C to +50°C
- Storage Temperature: -40°C to +60°C
- Relative Humidity (RH): 90% Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		DRAWING TITLE: <b>COAXIAL CIRCULATOR</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: CSN-30	
DATE: 05-29-2019		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: N/A	REV: A
DATE: 05-29-2019		DWG NO.: 85726	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	