


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

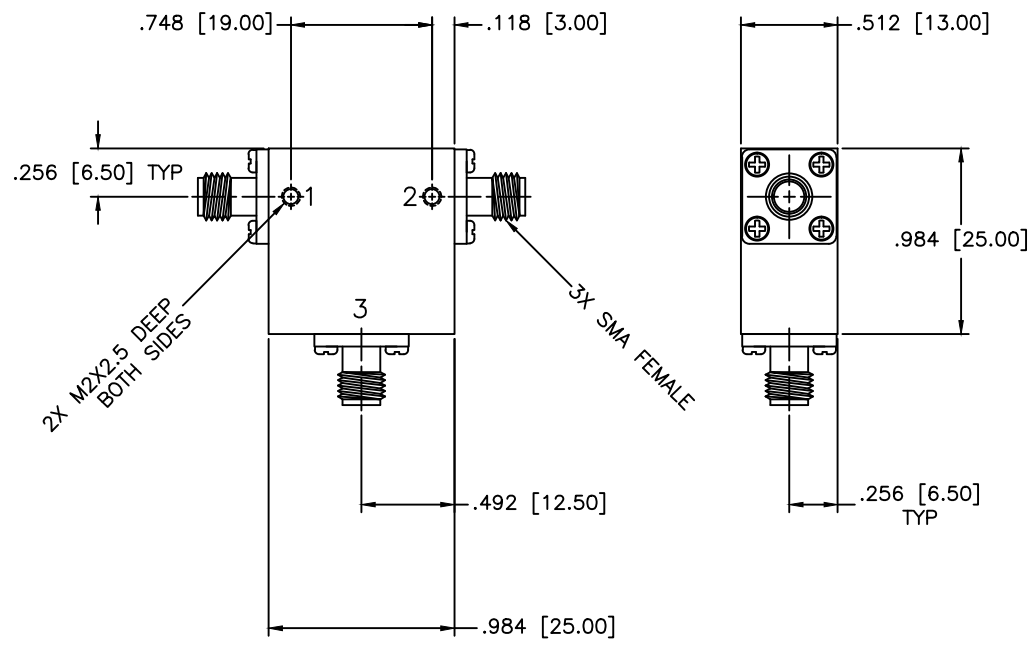

SPECIFICATIONS

Frequency Range: 2.5–2.7 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.22:1 Max.
 Operating Temperature: –45°C to +85°C
 Circulator Power:
 Average: 50 Watts
 Peak: 100 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR		
DRAWN: Paiboon Luekhamhan		PART NO. CSN-8		
DATE: 08-03-2010		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 08-03-2010		
THIRD ANGLE PROJECTION		SIZE:	N/A	REV:
		DO NOT SCALE THE DRAWING	REV:	N/A
				DWG NO. 85026