




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

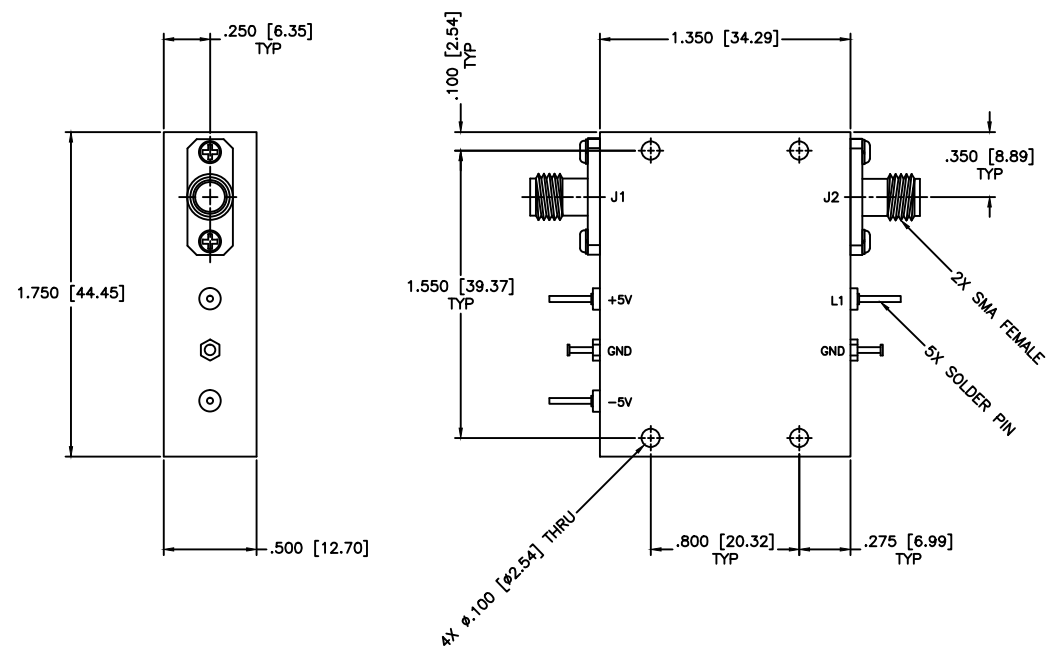

SPECIFICATIONS

Frequency Range: 13.2–13.4 GHz
 Switch Type: SP1T
 Isolation: 60dB min
 Insertion Loss: 2.0dB max
 VSWR: 1.90:1 Max.
 Input Power: 200mW (23dBm)
 Switching Time: 100 (nSec)
 Driver: Schottkey TTL
 Voltage/Current Required: ±5 Vdc @ ±30 mA, Typical
 Individual TTL Control Logic: Logic "0" (-0.3V to +0.8V) = ON
 Logic "1" (+2.0V to +5.0V) = OFF

TTL Control Logic
 L1 J1–J2
 0 Insertion Loss
 1 Isolation

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°				DRAWING TITLE:	PIN DIODE SWITCHES, ABSORPTIVE
DRAWN:		DATE:		PART NO.	
Paiboon Luekhamhan		08-27-2013		D1-44/ABS	
APPROVED:		DATE:		CAGE CODE:	SIZE: A
T. Nguyen		08-27-2013		0D2L5	REV: N/A
				DWG NO. 86343	
DO NOT SCALE THE DRAWING					

