




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

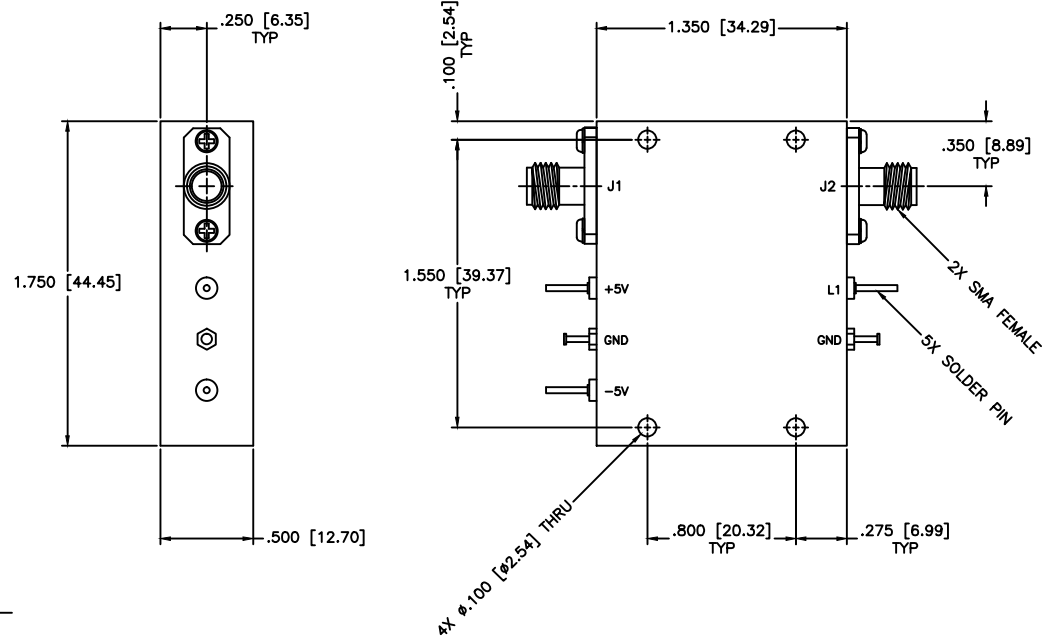

**SPECIFICATIONS**

Frequency Range: 2–18 GHz  
 Switch Type: SP1T  
 Isolation: 60dB min  
 Insertion Loss: 2.6dB max  
 VSWR: 2.00:1 Max.  
 Input Power: 200mW (23dBm)  
 Switching Time: 100 (nSec)  
 Driver: Schottkey TTL  
 Voltage/Current Required: ±5 Vdc @ ±30 mA, Typical  
 Individual TTL Control Logic: Logic "0" (-0.3V to +0.8V) = ON  
 Logic "1" (+2.0V to +5.0V) = OFF

TTL Control Logic  
 L1 J1–J2  
 0 Insertion Loss  
 1 Isolation

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE:	N/A
DRAWN: Paiboon Luekhamhan DATE: 03-14-2008 APPROVED: T. Nguyen DATE: 03-14-2008				PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION	SHEET:
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: PIN DIODE SWITCHES, ABSORPTIVE	
		PART NO.:		D1-9/ABS	
		CAGE CODE:	SIZE:	REV:	DWG NO.
		OD2L5	A	N/A	83778
DO NOT SCALE THE DRAWING					

