


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

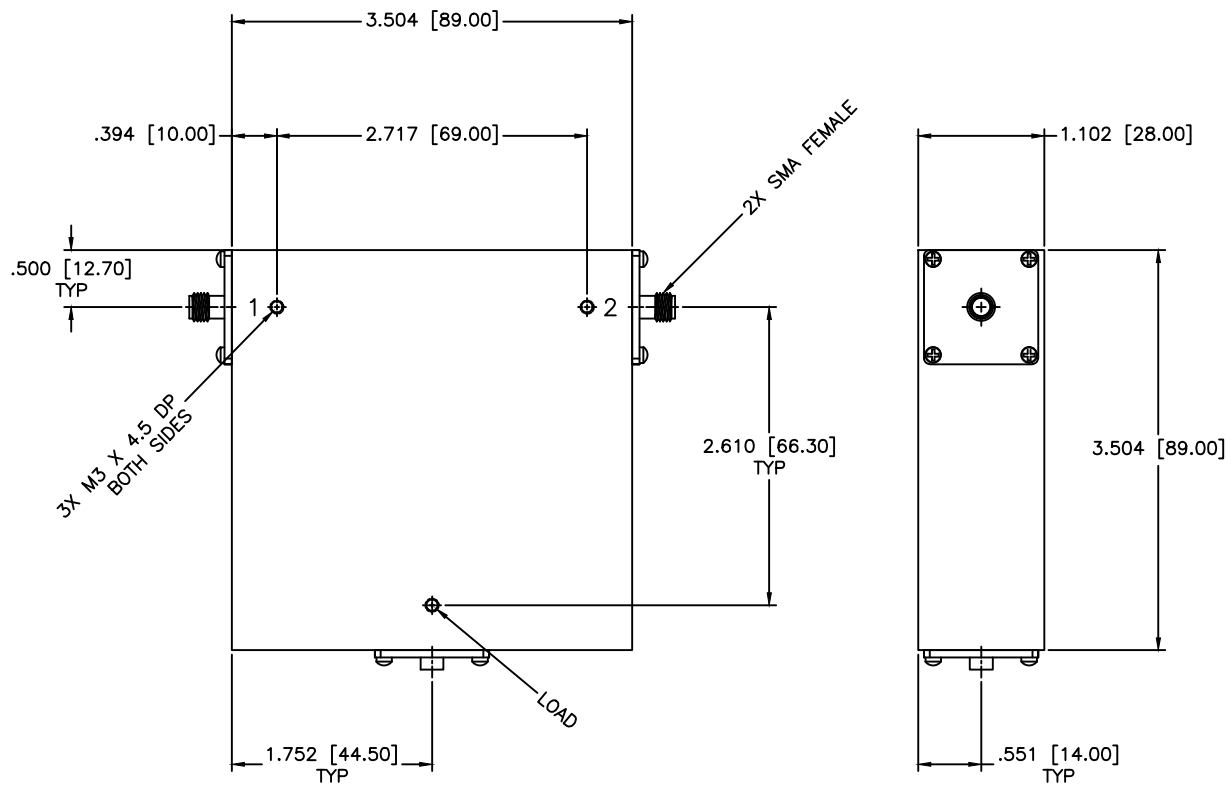

SPECIFICATIONS

Frequency Range: 0.80–2.50 GHz
 Isolation: 12dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.70:1 Max.
 Power: 1W Avg, 100W Peak
 Operating Temperature: +10°C to +40°C

MATERIAL:	DRAWING: Paiboon Luekhamhan	DATE: 08-30-2010	MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-8254 FAX: (727) 381-0110 http://www.mcli.com	SCALE: N/A
				SHEET: N/A
APPROVED: T. Nguyen	DATE: 08-30-2010	<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°</small>	DRAWING TITLE: COAXIAL ISOLATOR	
			PART NO.: IS-130	
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A	DWG NO.: 85042
DO NOT SCALE THE DRAWING				