


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

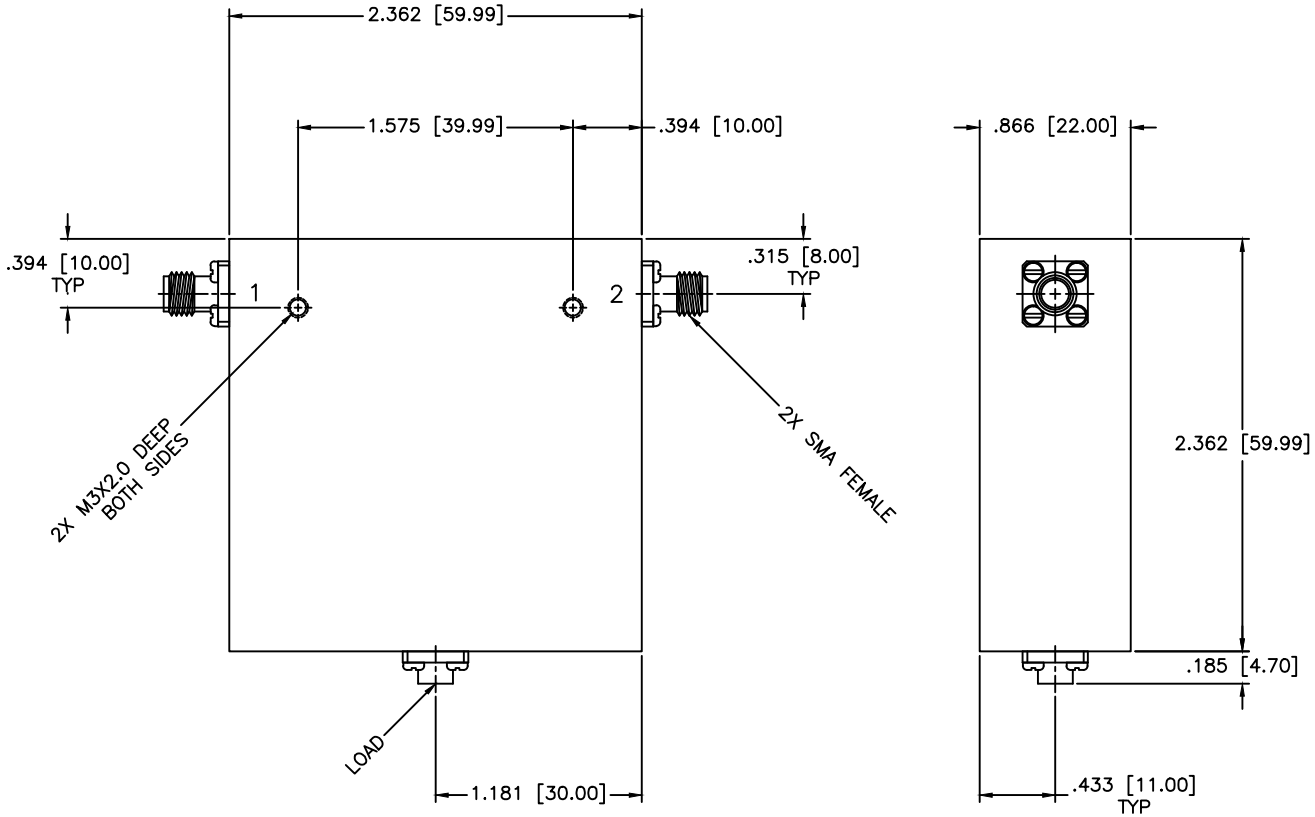

SPECIFICATIONS

Frequency Range: 1.5–2.5 Ghz
 Isolation: 20dB Min.
 Insertion loss: 0.4dB Max.
 VSWR: 1.25:1 Max.
 Power Avg: 1 Watt
 Operating Temperature: -0°C to +50°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 09-13-2011
APPROVED: T. Nguyen	DATE: 09-13-2011

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: COAXIAL ISOLATOR		PART NO. ISN-23	
CAGE CODE: OD2L5		SIZE: N/A	REV: A
THIRD ANGLE PROJECTION 		DWG NO. 82369	
DO NOT SCALE THE DRAWING			