


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

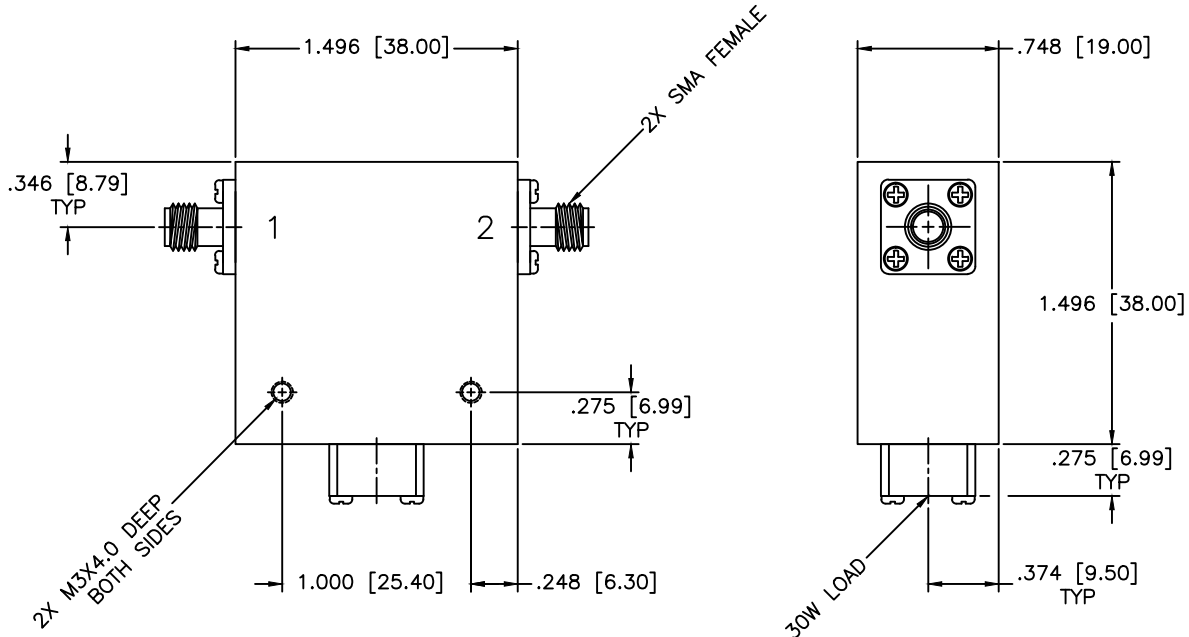

SPECIFICATIONS

Frequency Range: 1.0–1.12 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.3dB Max.
 VSWR: 1.50:1 Max.
 Average Power: 30W, 100W Peak
 Operating Temperature: -0°C to +50°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR 30 WATTS		
DRAWN: Paiboon Luekahamhan		PART NO. ISN-24		
DATE: 09-14-2005		CAGE CODE:	SIZE: N/A	REV: N/A
APPROVED: T. Nguyen		DATE: 09-14-2005	OD2L5	DWG NO. 82404
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		 DO NOT SCALE THE DRAWING		