


PORT CONFIGURATION			
0° Out	Sum	180° Out	Delta
1	2	3	4

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

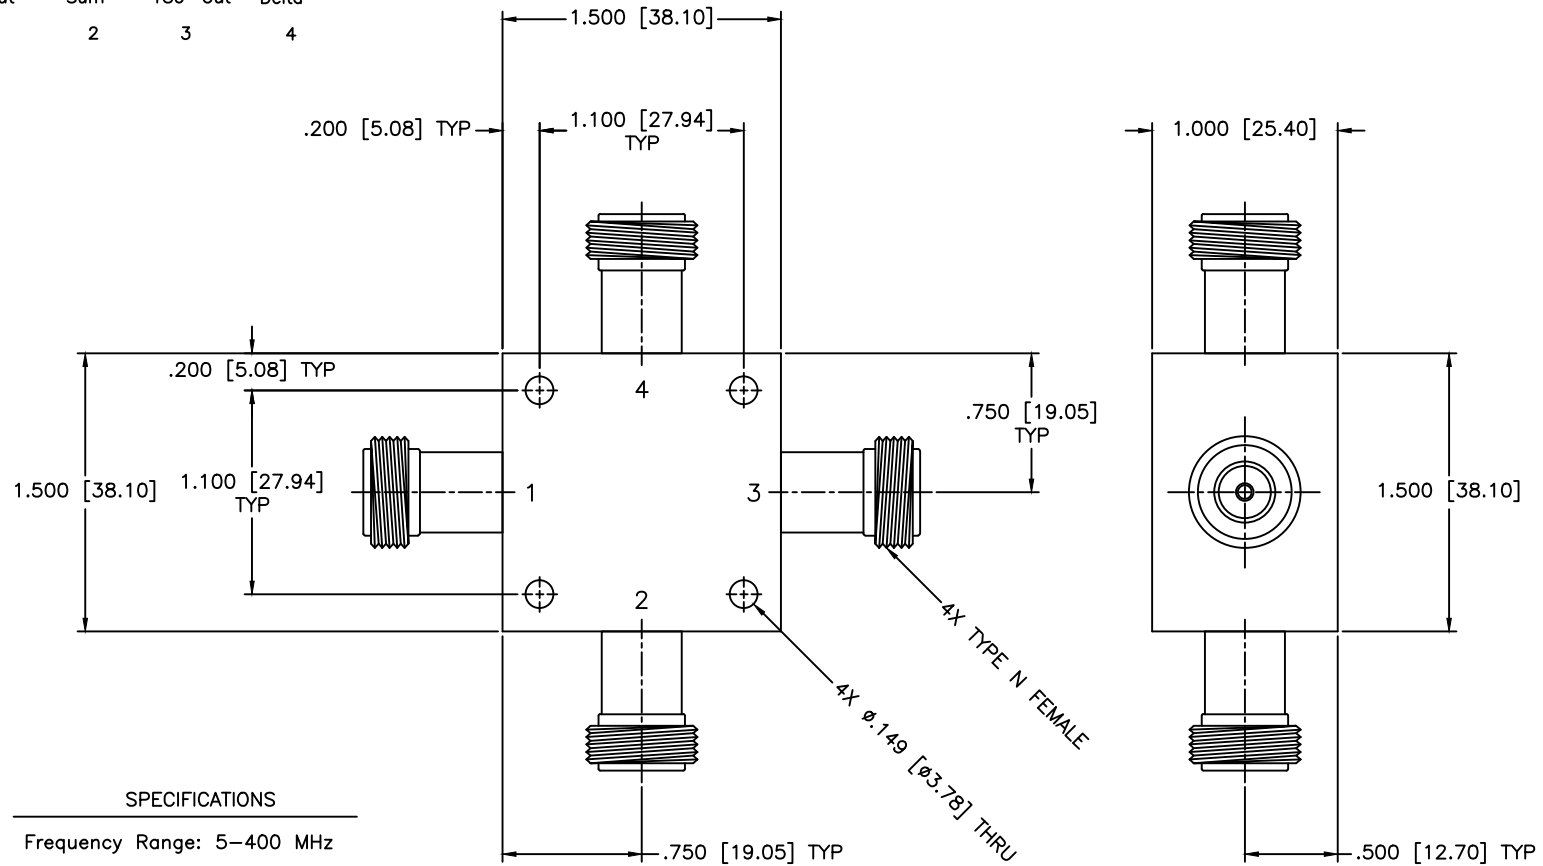

**SPECIFICATIONS**

Frequency Range: 5–400 MHz

Isolation: 20dB Min.

VSWR: 1.50:1 Max.

Insertion Loss: 1.5db Max.

Amplitude Balance: ±0.4dB Max.

Phase Balance: ±6.0° Max.

Operating Temperature: –55°C to +85°C

MATERIAL:	
DRAWN:	DATE:
Pai boon Luexhamhan	11-30-1997
APPROVED:	DATE:
T. Nguyen	11-30-1997

<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
	SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	180° FOUR PORT HYBRID	
THIRD ANGLE PROJECTION 	PART NO.	
CAGE CODE:	SIZE:	REV:
OD2L5	A	N/A
DO NOT SCALE THE DRAWING		DWG NO.
		84668