


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

PORT CONFIGURATION

0° Out	Sum	180° Out	Delta
1	4	3	2

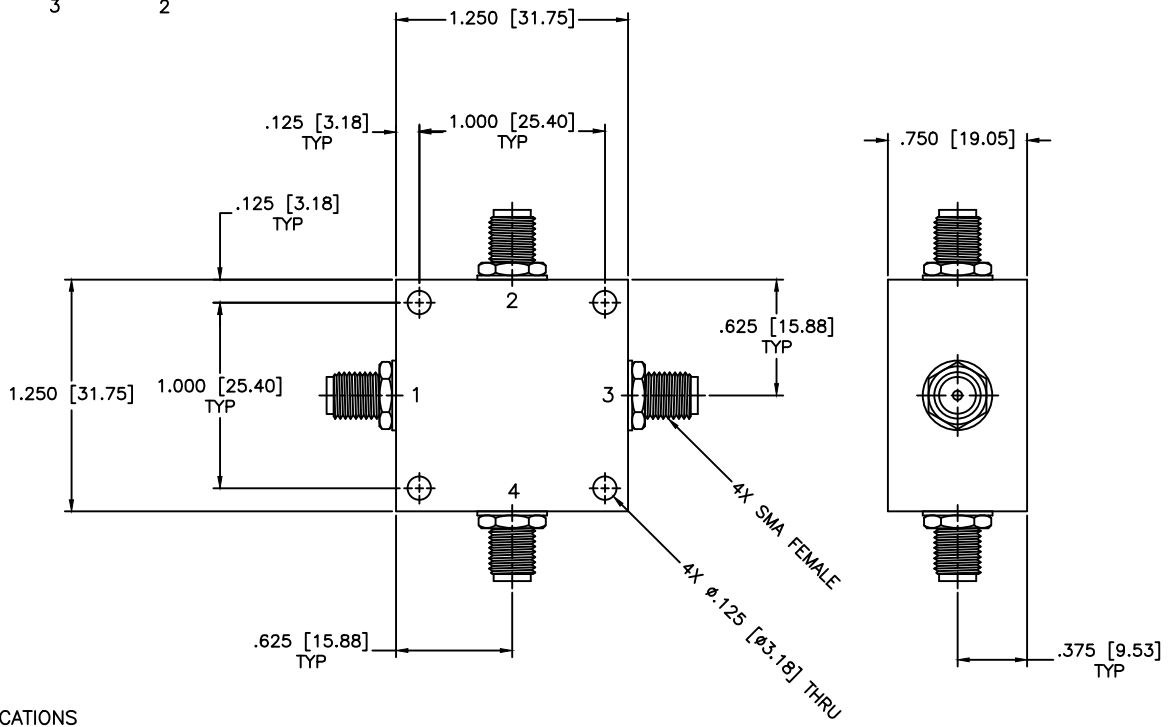

SPECIFICATIONS

- Frequency Range: 40–80 MHz
- Isolation: 20dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 1.0dB Max.
- Amplitude Balance: ±0.6dB Max.
- Phase Balance: ±2 Deg. Max.
- Operating Temperature: -55°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A	
DRAWING TITLE:		180° FOUR PORT HYBRID				
PART NO.:		JL-3				
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:	REV:	DWG NO.:
APPROVED:	DATE:		OD2L5	A	N/A	80738
Paiboon Luekhamhan T. Nguyen		11-30-1997 11-30-1997	DO NOT SCALE THE DRAWING			