


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

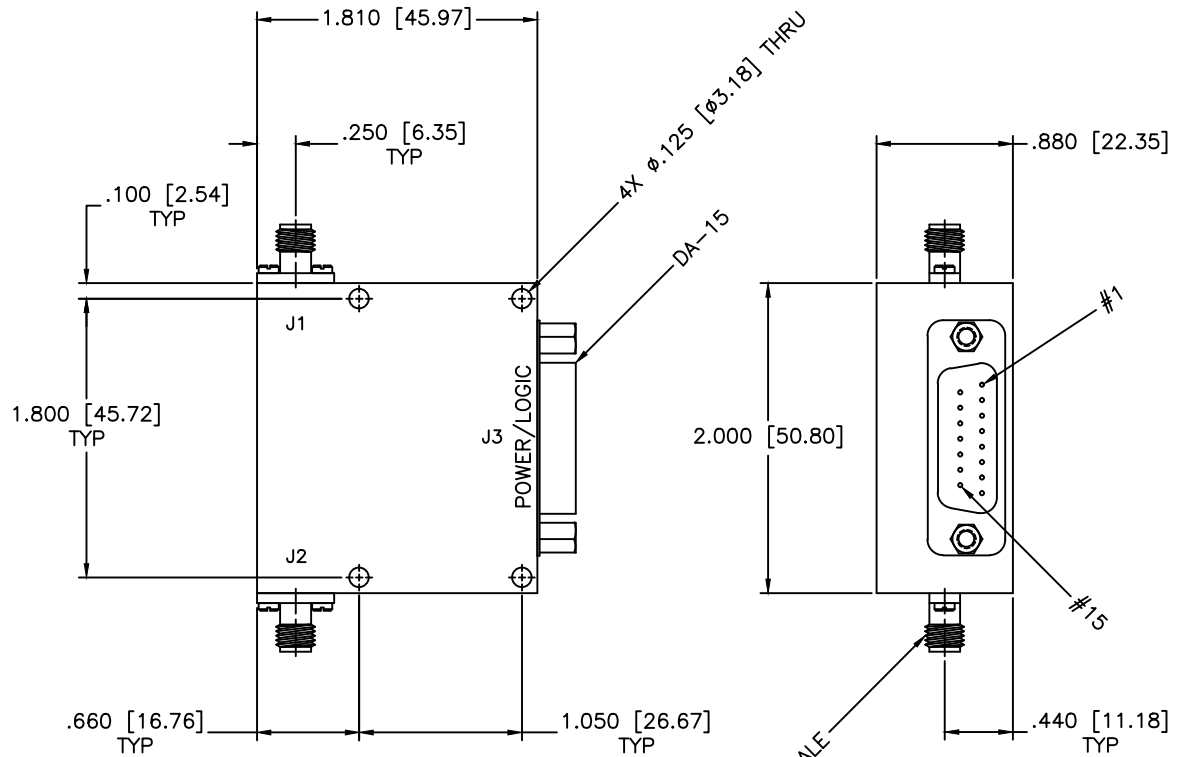

SPECIFICATIONS

- Frequency Range: 2-8 GHz
- Attenuator Range: 0-60dB
- Power Handling: 50mW CW
- Switching Speed: 500 nSec Max.
- Insertion Loss: 3.2dB
- Flatness: 10±0.5dB to 60±1.7dB
- VSWR: 1.90:1 Max.
- Operating Temperature: -55°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: PIN DIODE ATTENUATOR		
DRAWN: Paiibon Luekhamhan		PART NO.: LC-7		
DATE: 03-27-1999		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 03-27-1999		
<small>FREQUENTLY MISSED: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		SIZE: A	REV: N/A	DWG NO.: 81258
DO NOT SCALE THE DRAWING				