


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

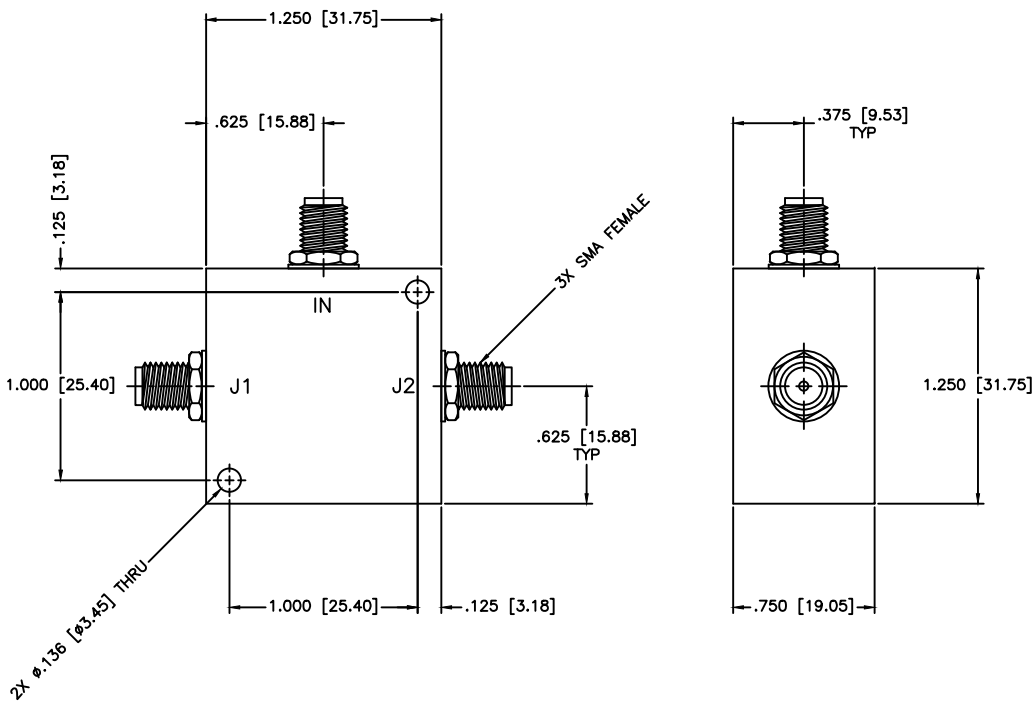

SPECIFICATIONS

Frequency Range: 5–2500 MHz
 Isolation: 20dB Min.
 VSWR: 1.50:1 Max.
 Insertion Loss: 1.8dB Max.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±6 Deg. Max.
 Power: 1W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY LUMPED ELEMENT POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-10		
DATE: 08-04-2011	DATE: 08-04-2011	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 08-04-2011	SIZE: A	REV: N/A	DWG NO. 82077
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		DO NOT SCALE THE DRAWING		