


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

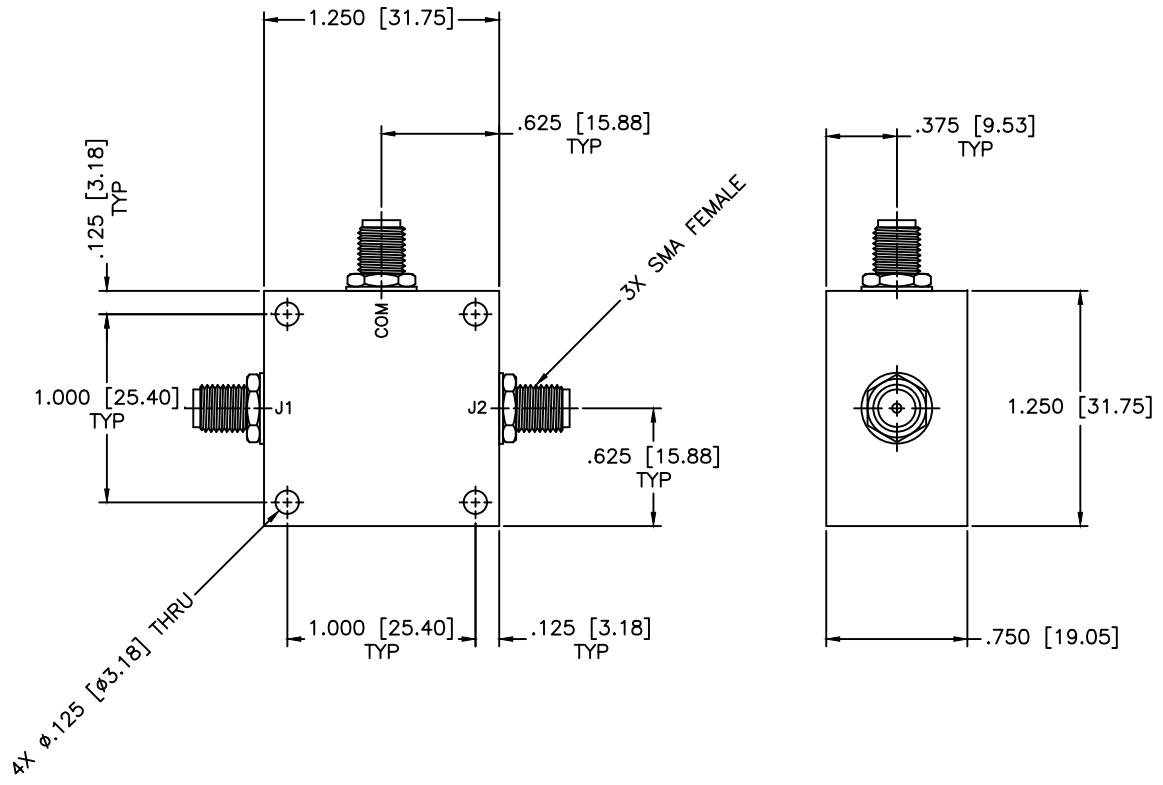

SPECIFICATIONS

- FREQUENCY RANGE: 0.5–100 MHz
- INSERTION LOSS: 0.5dB Max.
- VSWR: 1.30:1 Max.
- ISOLATION: 30dB Min.
- PHASE BALANCE: ±2 Deg. Max.
- AMPLITUDE BALANCE: ±0.2dB Max.
- IMPEDANCE: 50 Ohms
- OPERATING TEMPERATURE: -30°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:	
DATE:			2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:	
DATE: 12-22-1997			PL2-2	
APPROVED: T. Nguyen		THIRD ANGLE PROJECTION 	CAGE CODE:	SIZE:
DATE: 12-22-1997			OD2L5	A
		DO NOT SCALE THE DRAWING		DWG NO.:
				80125