


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

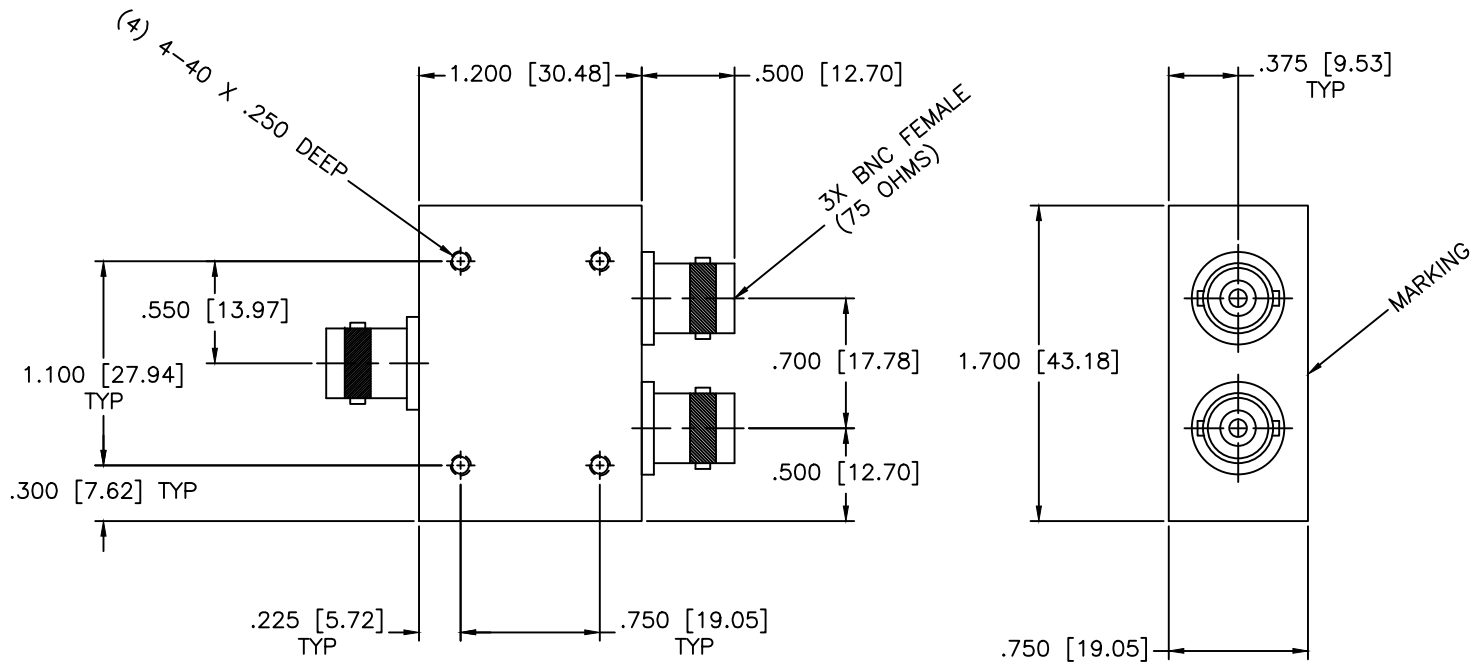

SPECIFICATIONS

Frequency Range: 70–140 MHz
 Isolation: 20dB Min.
 Insertion Loss: 0.7dB Max.
 Amplitude Balance: ±0.2dB Max.
 VSWR: 1.20:1 Max.
 Phase Balance: ±2 Deg. Max.
 Impedance: 75 Ohm
 Input Power: 1 Watt Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:	N/A
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		2-WAY POWER DIVIDER PART NO.			
APPROVED:		THIRD ANGLE PROJECTION 		PL2-21-S-75/BF			
DATE:		DATE:		CAGE CODE:	SIZE:	REV:	DWG NO.
Paiboon Luekhamhan		01-20-1997		OD2L5	A	A	81494
T. Nguyen		01-20-1997		DO NOT SCALE THE DRAWING			