


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

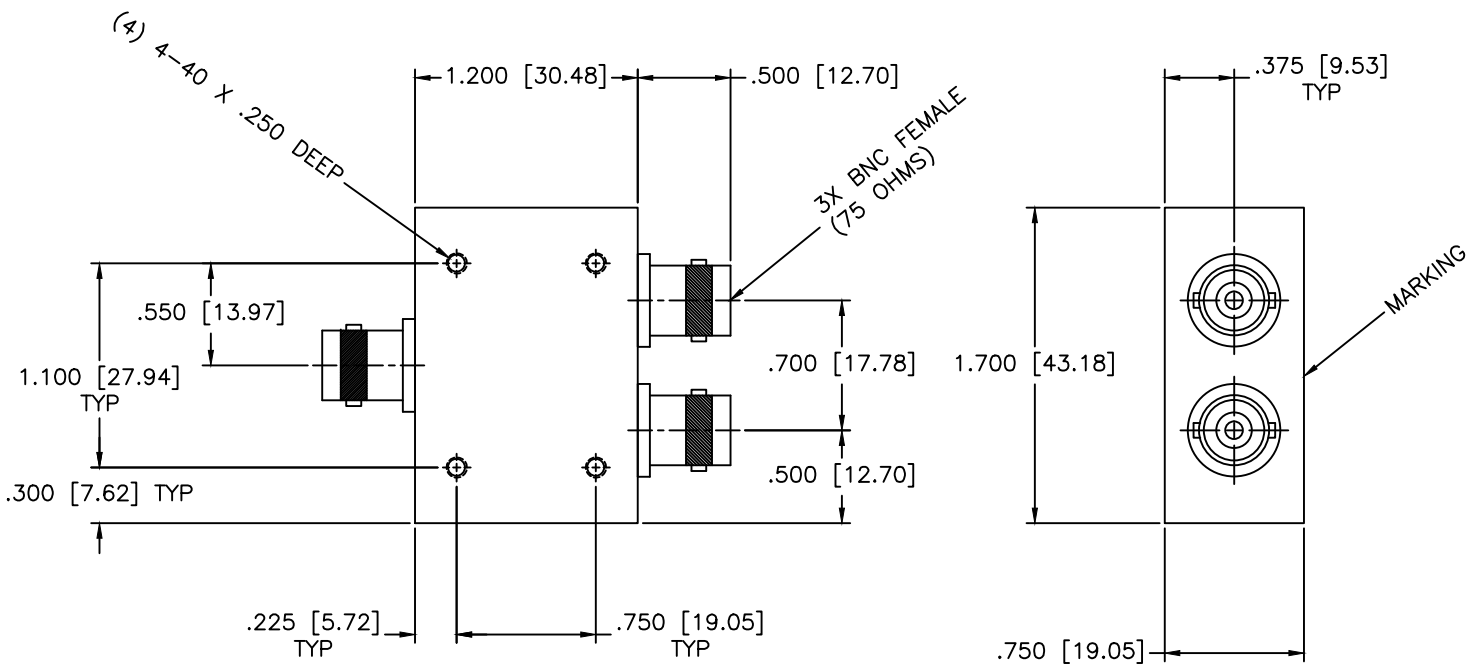

SPECIFICATIONS

Frequency Range: 5–2000 MHz
 Isolation: 15dB Min.
 Insertion Loss: 1.4dB Max.
 Amplitude Balance: ±0.6dB Max.
 VSWR: 1.20:1 Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 75 Ohm
 Input Power: 0.5W Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PL2-37-S-75/BF	
DATE: 04-12-2010	DATE: 04-12-2010	CAGE CODE: OD2L5	SIZE: A REV: A DWG NO. 84752
APPROVED: T. Nguyen	THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	