


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

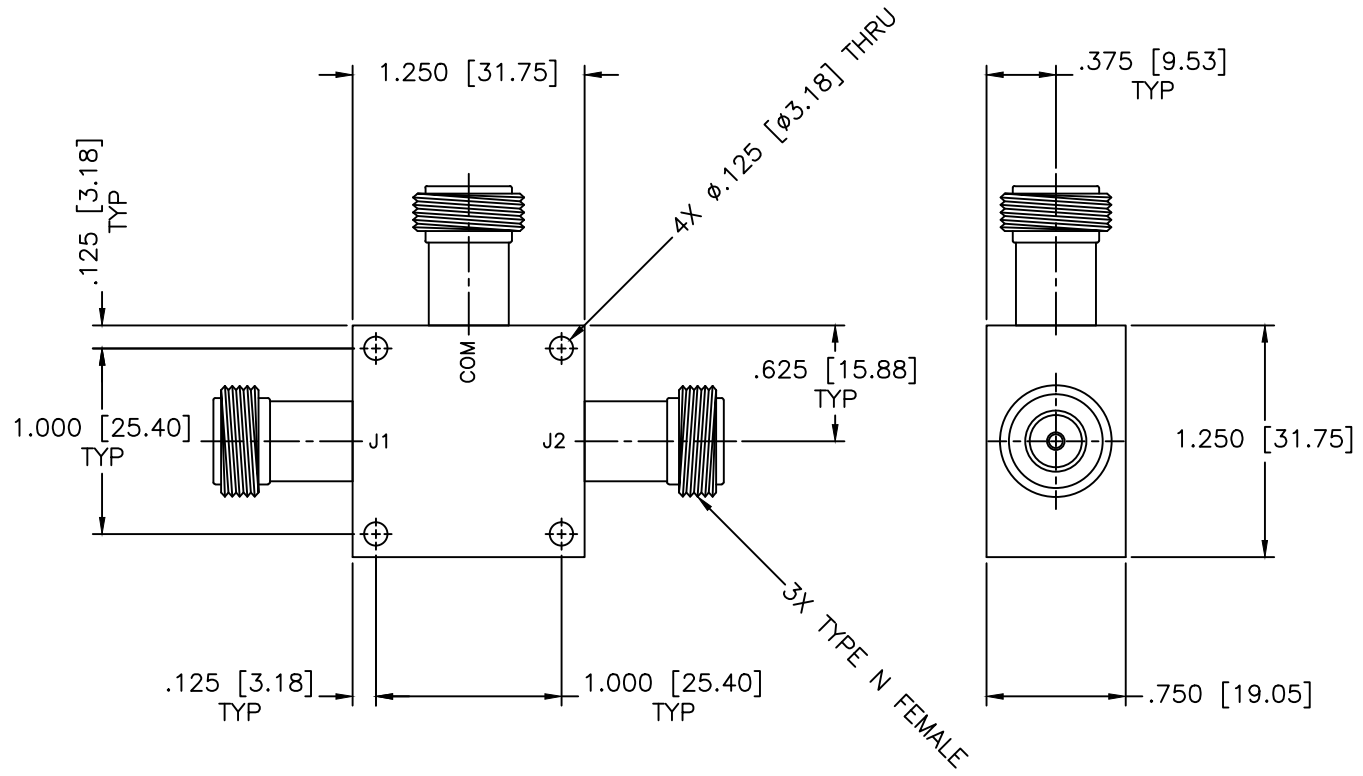

SPECIFICATIONS

- Frequency Range: 2–500 MHz
- Isolation: 28dB Min.
- Insertion Loss: 0.7dB Max.
- Amplitude Balance: ± 2.0 dB Max.
- VSWR: 1.30:1 Max.
- Phase Balance: ± 2.0 dB Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWING TITLE:		2-WAY POWER DIVIDER				
PART NO.:		PL2-3/NF				
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE: A	REV: N/A	DWG NO.:
APPROVED: T. Nguyen	DATE: 10-22-1997		OD2L5	DO NOT SCALE THE DRAWING		80117

