


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

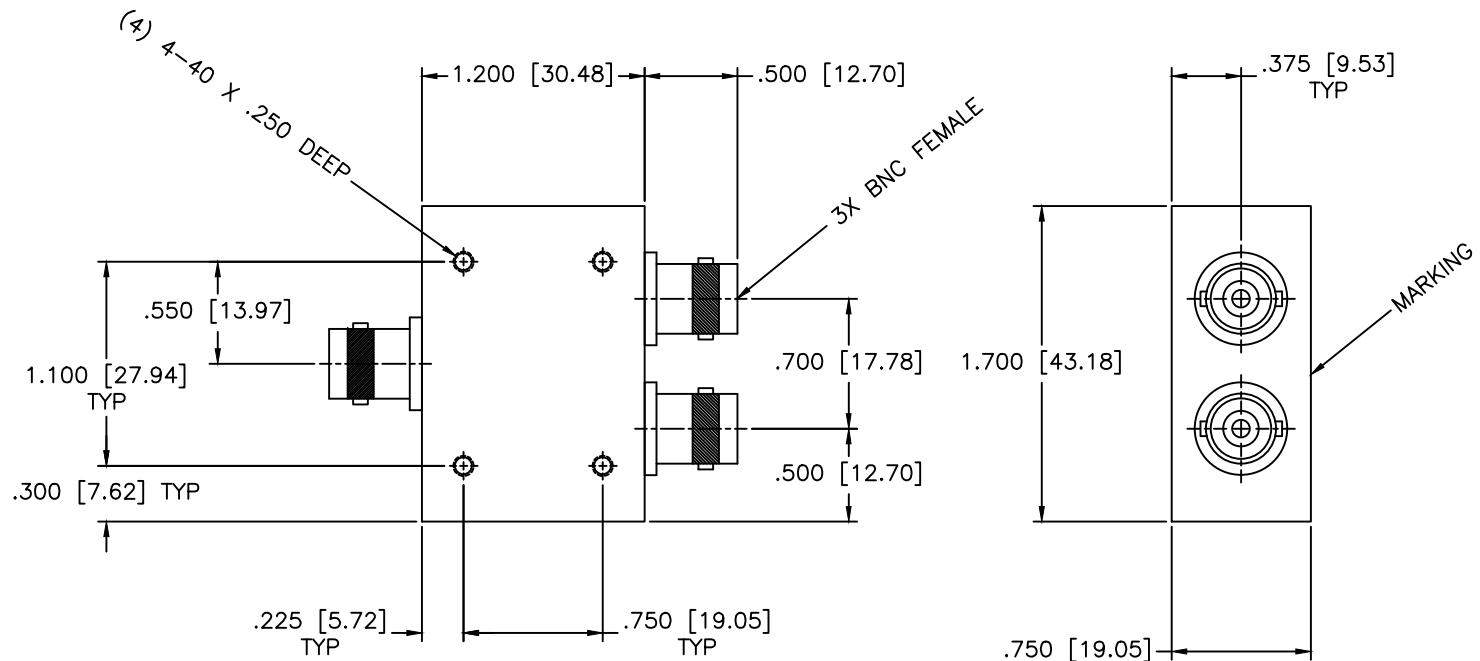

SPECIFICATIONS


Frequency Range: 10–1000 MHz
 Isolation: 19dB Typ.
 VSWR: 1.30:1 Max.
 Insertion Loss: 1.5dB Max.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 50 Ohm
 Operating Temperature: –40°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	N/A
DRAWN:		PART NO.		2-WAY POWER DIVIDER		
DATE:		CAGE CODE:		PL2-5-S/BF		
APPROVED:		SIZE:		REV:	DWG NO.	
T. Nguyen		A		N/A	84487	
DATE:		DO NOT SCALE THE DRAWING				
05-20-2009		OD2L5				



UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)



DRAWING TITLE:
 2-WAY POWER DIVIDER

PART NO.
 PL2-5-S/BF

CAGE CODE: OD2L5
 SIZE: A
 REV: N/A
 DWG NO.: 84487

DO NOT SCALE THE DRAWING