


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

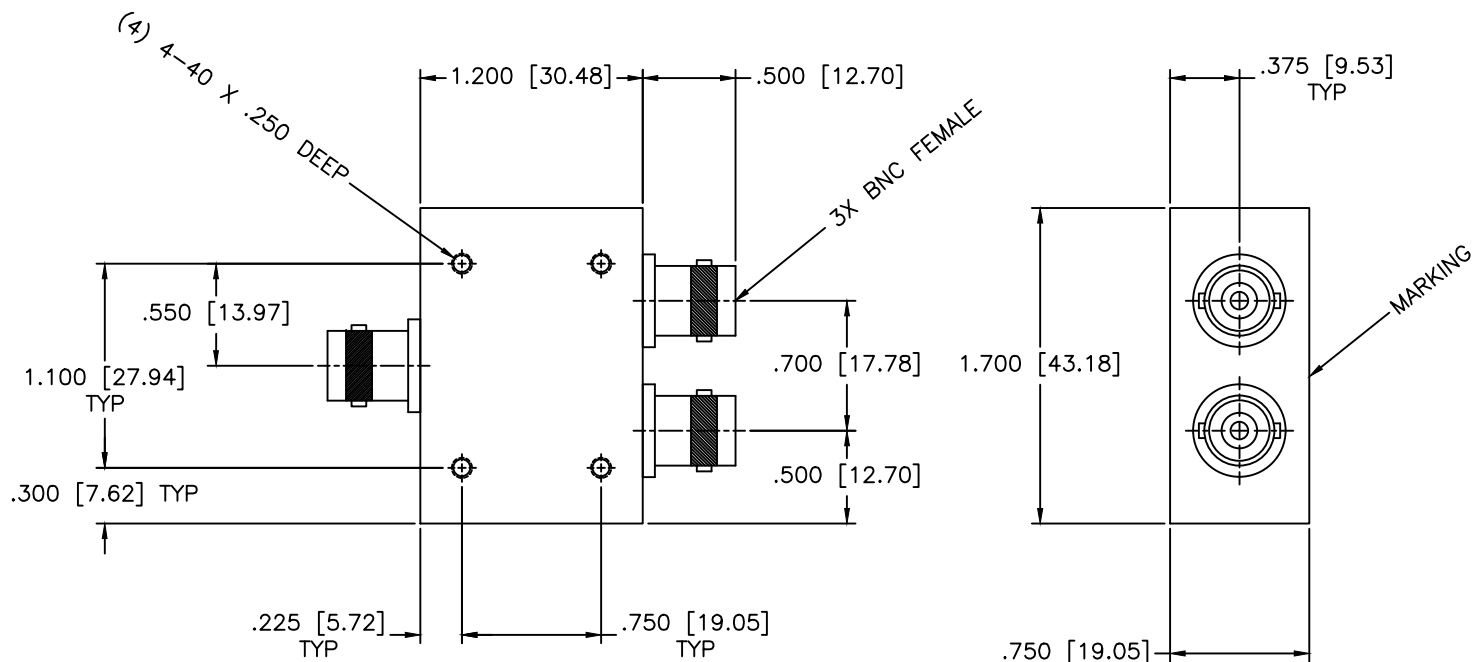

SPECIFICATIONS

Frequency Range: 20–2000 MHz
 Isolation: 15dB Min.
 VSWR: 1.60:1 Max.
 Insertion Loss: 1.5dB Max.
 Amplitude Balance: ±0.7dB Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 50 Ohm
 Operating Temperature: -40°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
					SHEET:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:			2-WAY POWER DIVIDER
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.			PL2-9-S/BF
DRAWN:	DATE:	THIRD ANGLE PROJECTION 		CAGE CODE:	SIZE:	REV:	DWG NO.
Paiboon Luekhamhan	05-20-2009			OD2L5	A	N/A	84488
APPROVED:	DATE:			DO NOT SCALE THE DRAWING			
T. Nguyen	05-20-2009						