


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

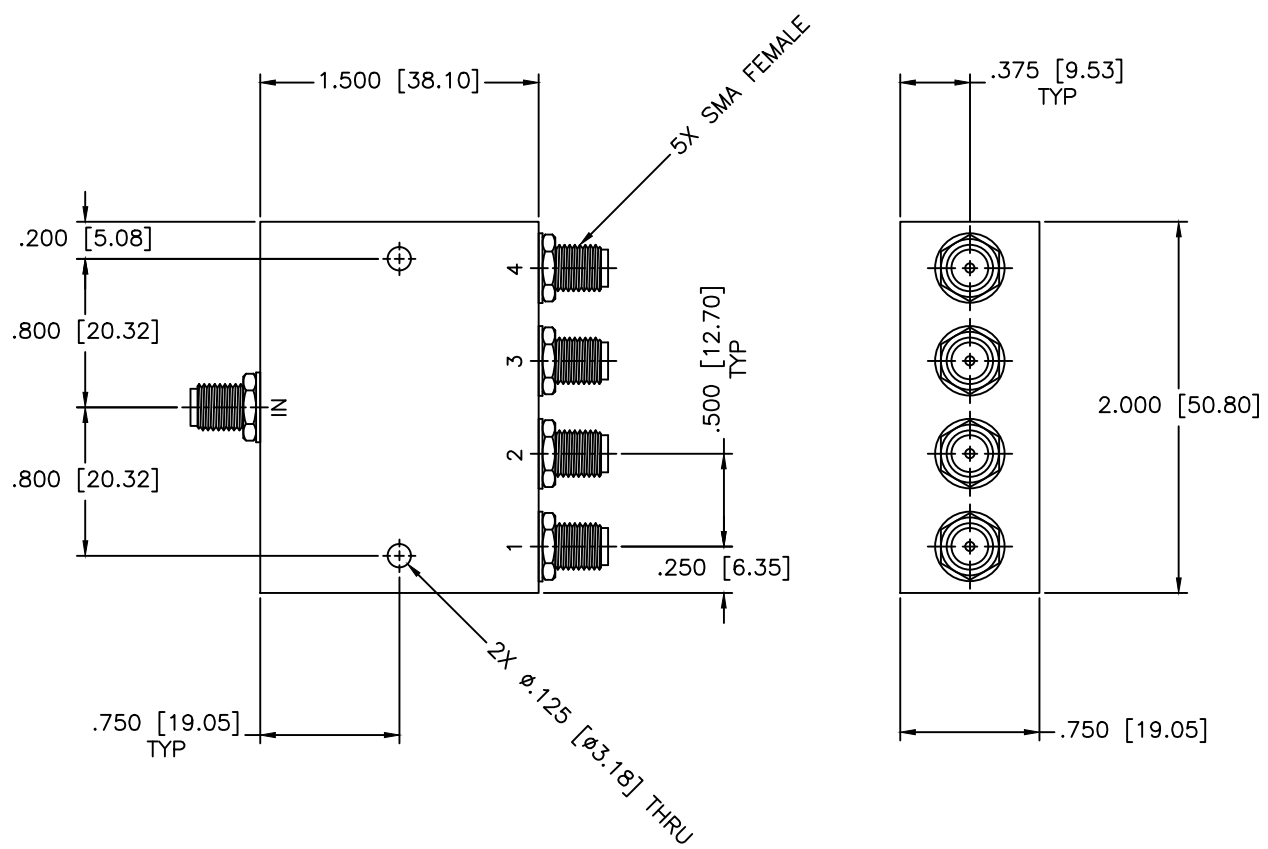

**SPECIFICATIONS**

Frequency Range: 200–2000 MHz  
 Isolation: 15dB Min.  
 Insertion Loss: 2.6dB Max.  
 Amplitude Balance: ±0.5dB Max.  
 Phase Balance: ±10 Deg. Max.  
 VSWR: 2.00:1 Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°				DRAWING TITLE:	4-WAY POWER DIVIDER
		DRAWN: Paiboon Luekhamhan	DATE: 07-31-2001	PART NO. PL4-5	
APPROVED: T. Nguyen	DATE: 07-31-2001	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 80171
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	