


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

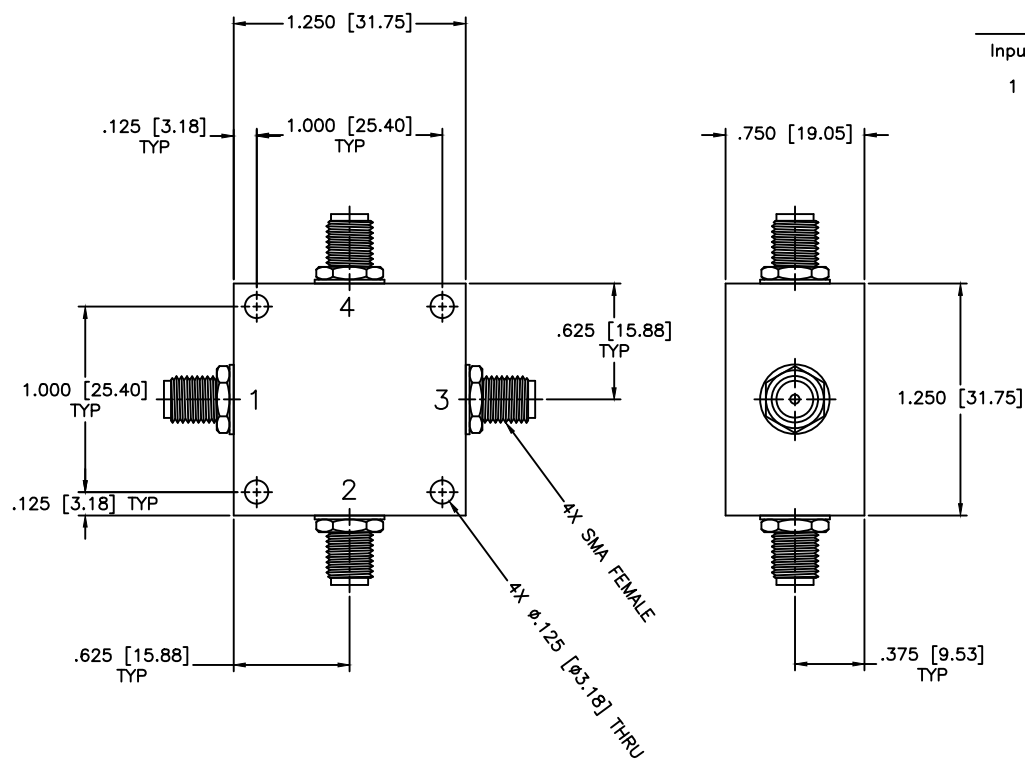

PORT CONFIGURATION			
Input	90° Out	Isolated	0° Out
1	2	3	4

SPECIFICATIONS

- Frequency Range: 40–80 MHz
- Isolation: 20dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 0.6dB Max.
- Amplitude Balance: ±0.6dB Max.
- Phase Balance: ±2 Deg. Max.
- Operating Temperature: -55°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	90° HYBRID, OCTAVE
DRAWN:		DATE:		PART NO.		
Paiboon Luekhamhan		11-30-1997		BL-3		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		11-30-1997		OD2L5	A	N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		DWG NO.
		THIRD ANGLE PROJECTION 				80708