


FREQUENCY RANGE: 1.3–2.6 GHz Power: 50 Watts Forward, 10 Watts Reverse									
Specifications at 25±5°C					Specifications From 0°C to +55°C				
Isolation Port (dB) Min.		Insertion Loss Port (dB) Max.		VSWR Max.	Isolation Port (dB) Min.		Insertion Loss Port (dB) Max.		VSWR Max.
2–1	3–2	1–2	2–3	All Port	2–1	3–2	1–2	2–3	All Port
40	17	0.90	0.45	1.25	34	16	1.00	0.50	1.35

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

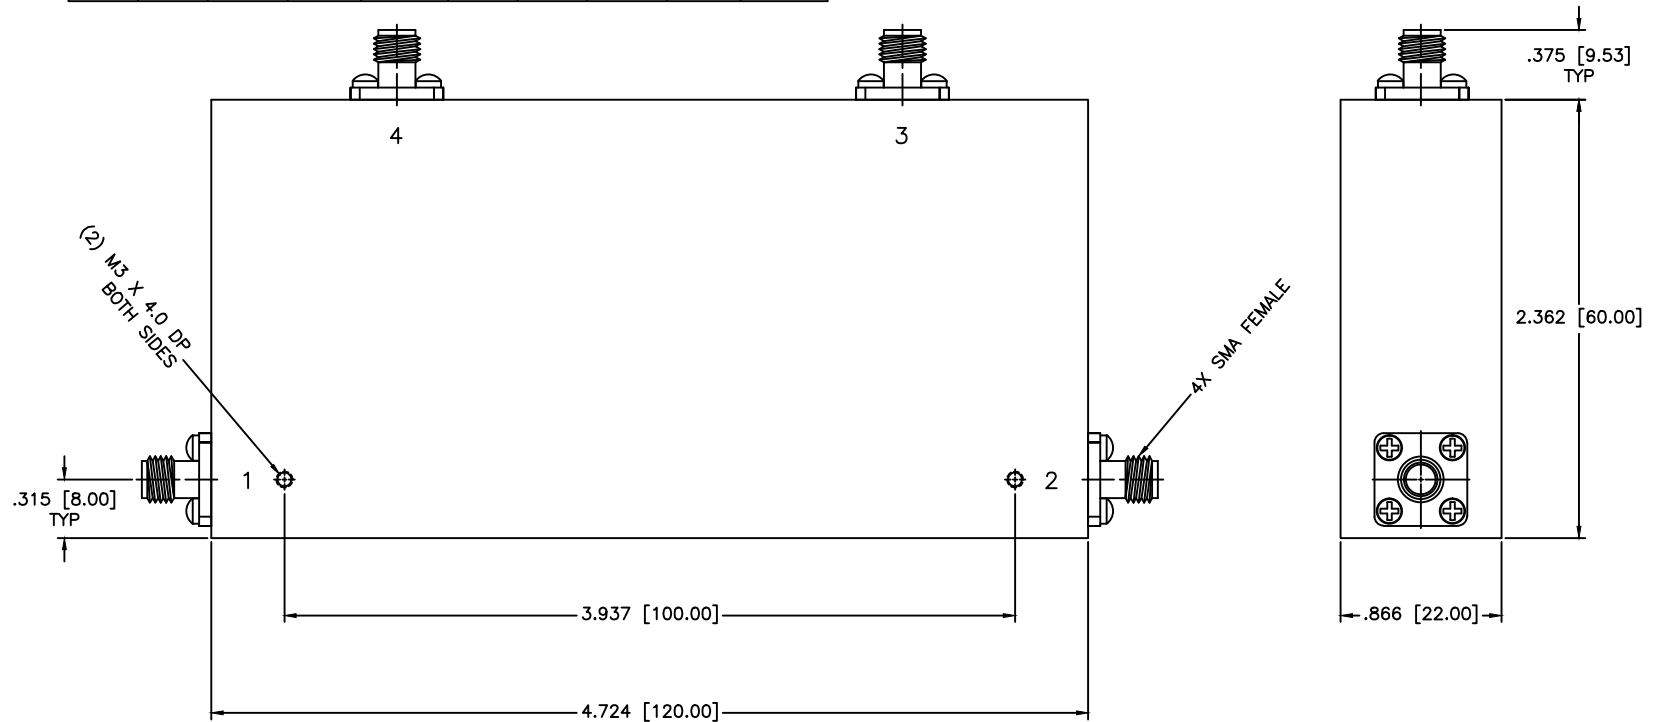

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		DRAWING TITLE:	DUAL JUNCTION CIRCULATOR	
DRAWN: Paiboon Luekhamhan		DATE: 06-03-2016	PART NO. CSDJ-11	
APPROVED: T. Nguyen		DATE: 06-03-2016	CAGE CODE: OD2L5	SIZE: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A	DWG NO. 86623	DO NOT SCALE THE DRAWING
THIRD ANGLE PROJECTION				