
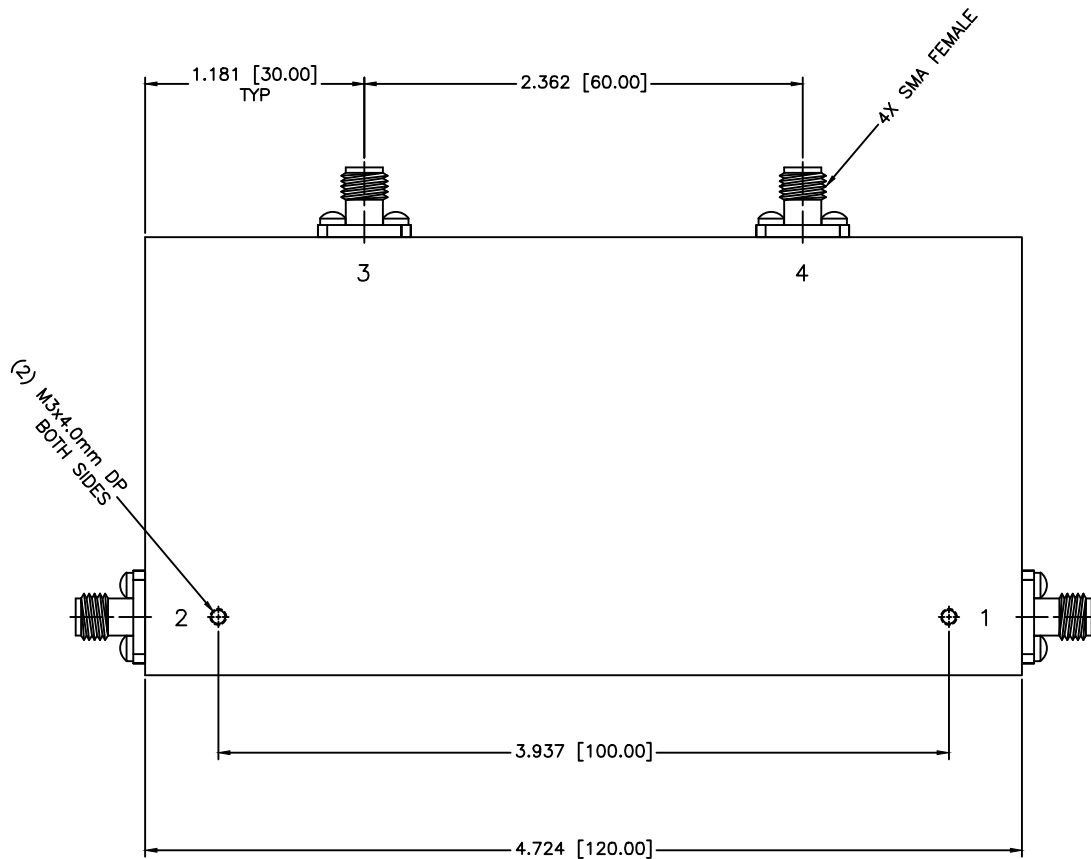


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

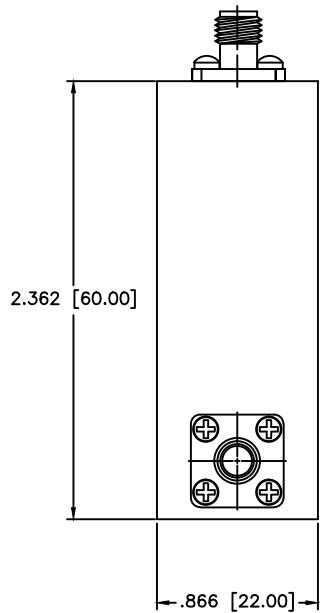

SPECIFICATIONS AT 25±5°C

FREQUENCY RANGE: 1.3–2.8 GHz
 Power: 50 Watts Forward, 10 Watts Reverse

Isolation Port (dB) Min.	Insertion Loss Port (dB) Max.	VSWR Max.
2–1	3–2	1–2
4–3	1–4	2–3
34	15	1.20
		0.60
		1.35

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-09-2017
APPROVED: T. Nguyen	DATE: 11-09-2017



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.02 ±.009
 ANGLE: ±1/2°

DRAWING TITLE:
DUAL JUNCTION CIRCULATOR

PART NO.
CSDJ-12

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG. NO. 86695
DO NOT SCALE THE DRAWING			

