


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

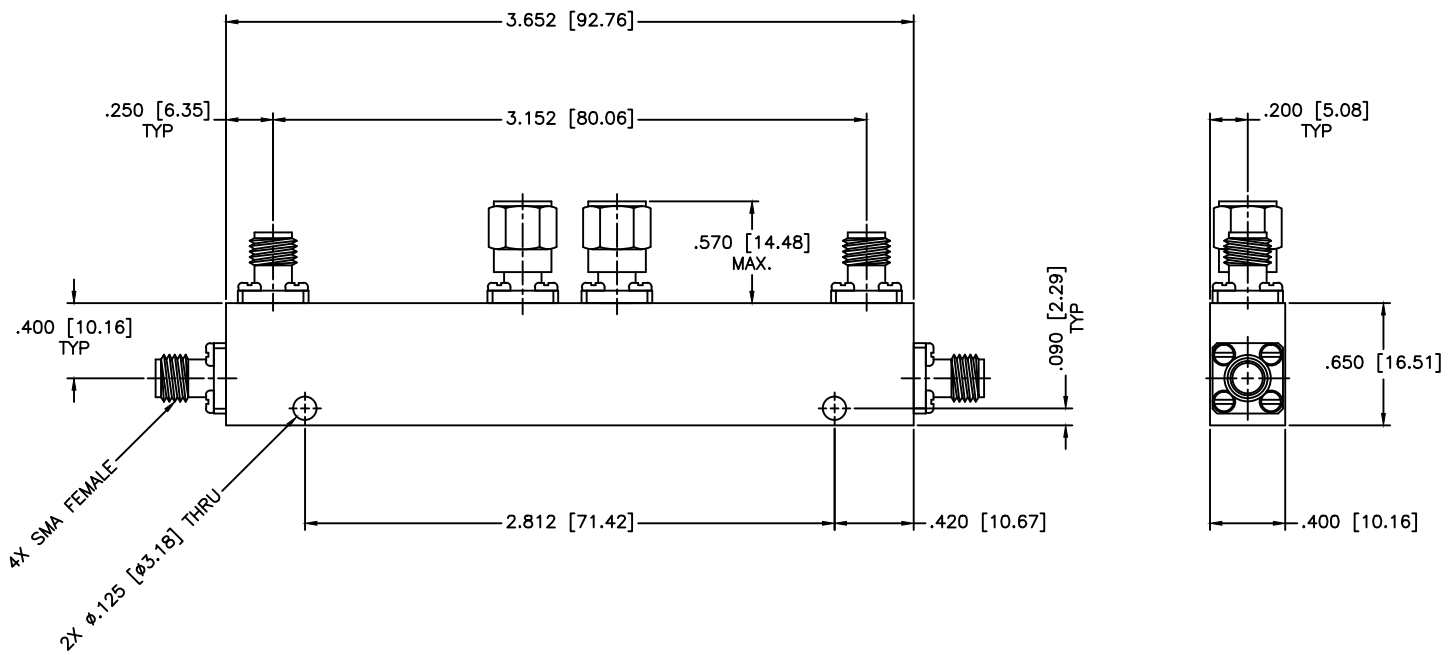

SPECIFICATIONS

Frequency Range: 0.95–1.20 GHz

VSWR: 1.10:1 Max.

Insertion loss (ex-cpl): 0.20dB Max.

Directivity: 25dB Min.

Freq Sensitivity: ±0.75dB

Isolation: 20dB Min.

Power (Avg/Peak): 5W/3kW

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-15-2005
APPROVED: T. Nguyen	DATE: 04-15-2005

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ± .02 ± .009
ANGLE: ± 1/2°

THIRD ANGLE PROJECTION

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	DUAL DIRECTIONAL COUPLER		
PART NO.:	DC15-20		
CAGE CODE:	SIZE: A	REV: N/A	DWG NO. 82329
DO NOT SCALE THE DRAWING			