
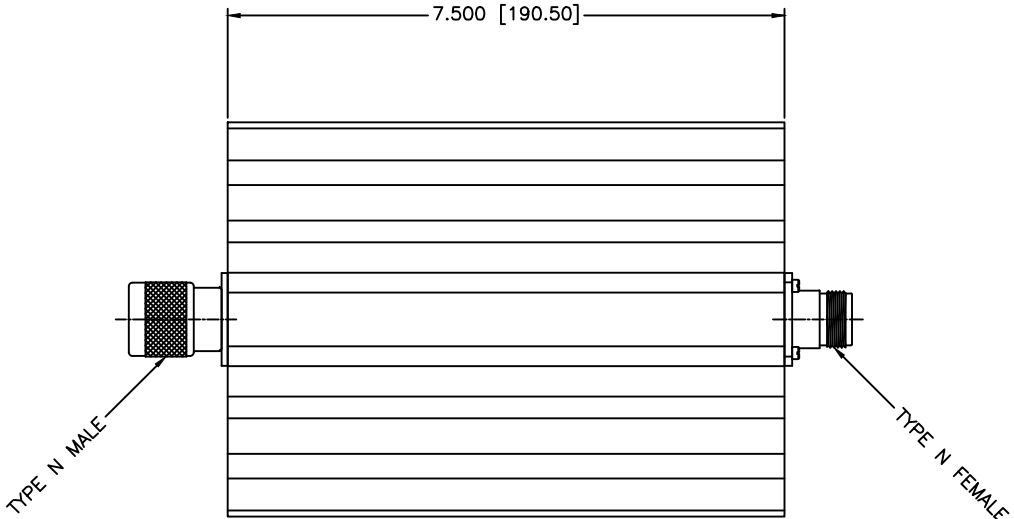


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

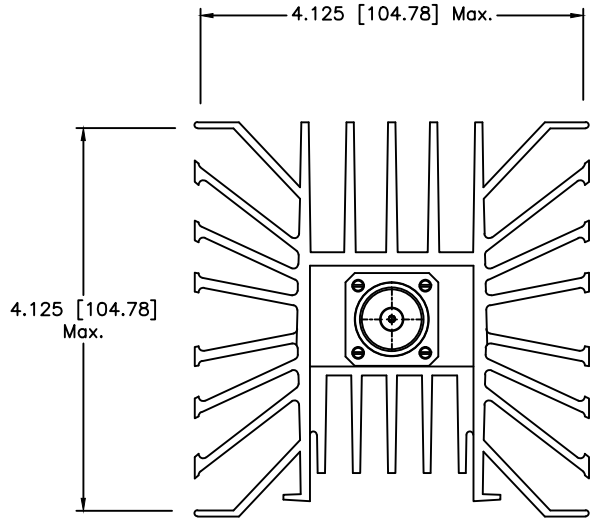

SPECIFICATIONS

Frequency Range: DC-2.4 GHz
 VSWR: DC to 1 GHz = <1.15:1
 1 to 2.4 GHz = <1.35:1
 Power: 150 Watts Average/Peak 2kW Max.
 Attenuation Value: 3 to 30dB
 Attenuation Accuracy: ±.3dB or 3% Whichever is greater
 Connector: Type N Male Input and Female Output

		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7295 35TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8116 WWW.MCL.COM		SCALE: N/A SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) MILLIMETERS FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLES: ±1/2°		DRAWING TITLE: POWER COAXIAL ATTENUATORS PART NO.: FAN-10-30/150		
DRAWN: Paloon Luthamban DATE: 07-07-2008	APPROVED: T. Nguyen DATE: 07-07-2008	CASE CODE: OD2L5 	SIZE: C REV: N/A	DRAW NO.: 83743