


ZONE		REV	DESCRIPTION	DATE	APPROVED

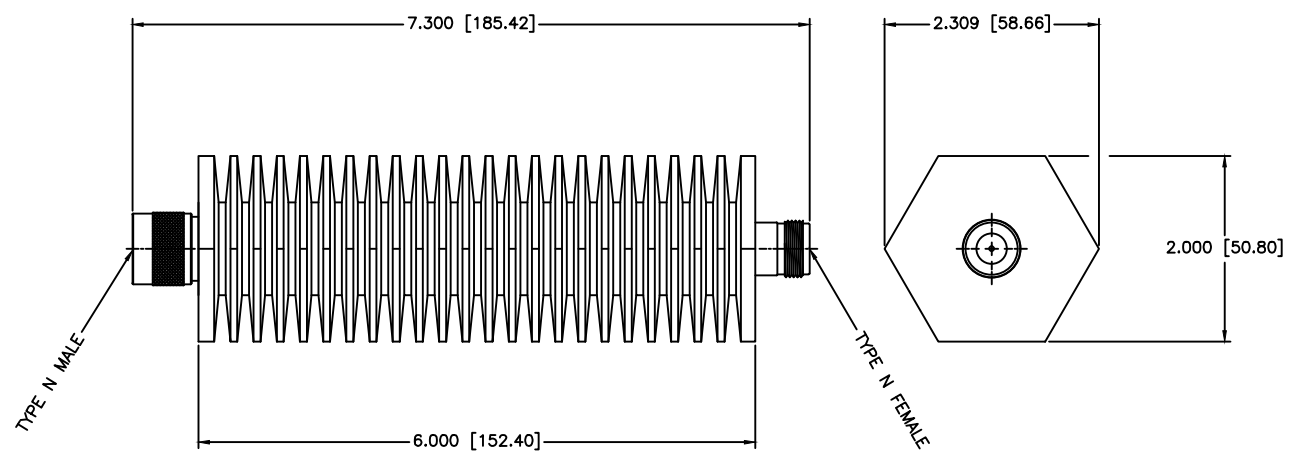

SPECIFICATIONS

Frequency Range: DC to 3.0 GHz
 VSWR: 1.30:1 Max.
 Attenuation Value: 50±1.30dB
 Power @ 25°C: 50 Watts
 Operating Temperature: -65°C to +125°C
 Impedance: 50 ohms

MECHANICAL

N Connectors: Passivated Stainless Steel
 Conductors: Gold Plated Beryllium Copper
 Housing: Anodized Aluminum

DRAWN: Paboon Luethamhan DATE: 11-08-2000 APPROVED: T. Nguyen DATE: 11-08-2000	MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8118 WWW.MCLI.COM	SERIAL:	SCALE: N/A
		PART NO.: FAN-7-50	SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLES: ± 1/2°		DRAWING TITLE: COAXIAL ATTENUATOR	
CAGE CODE: 0D2L5		SHEET: C	REV: N/A
DO NOT SCALE THE DRAWING		DWG NO.: 81572	