


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

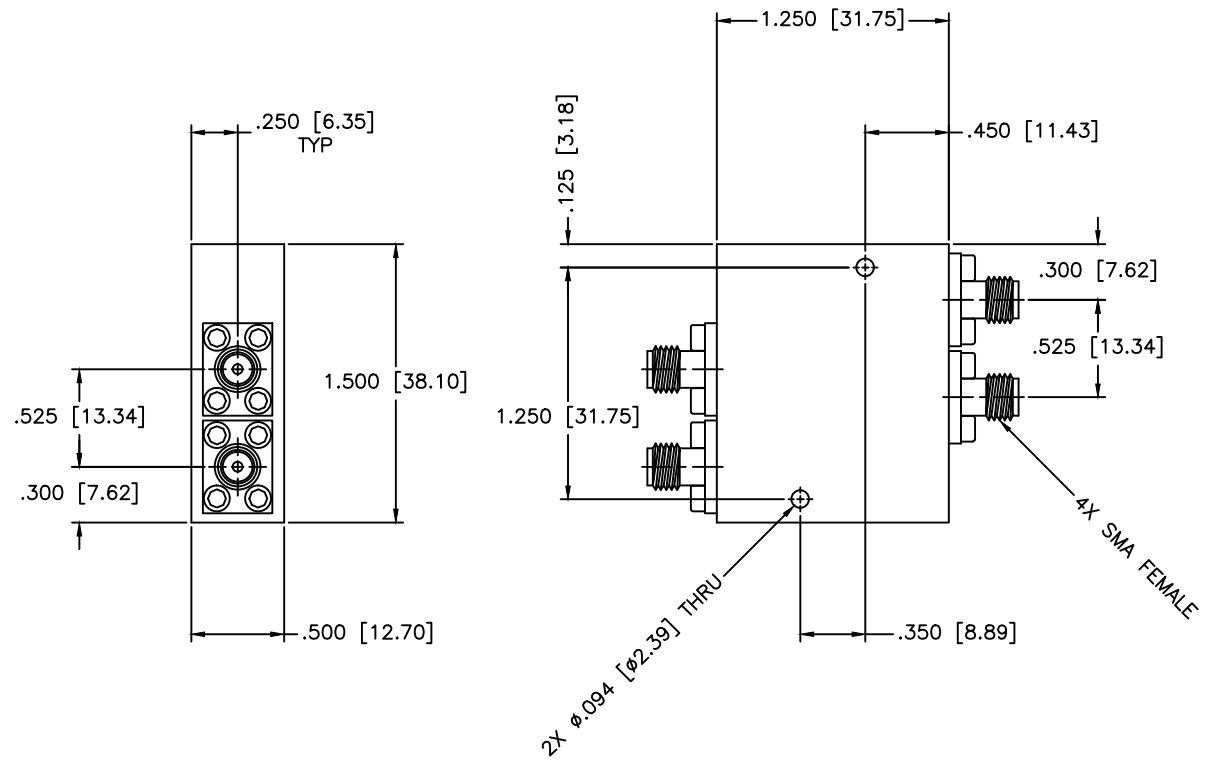

SPECIFICATIONS

Frequency Range: 14.0–14.5 GHz
 Isolation: 14dB Min.
 VSWR: 1.55:1 Max.
 Insertion Loss: 0.7dB Max.
 Phase Balance: ±6 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		180° HYBRID
DRAWN:		DATE:	PART NO.		HJ-16	
Paiboon Luekhamhan		01-16-2009	CAGE CODE:		SIZE:	REV:
APPROVED:		DATE:	OD2L5		A	N/A
T. Nguyen		01-16-2009	DO NOT SCALE THE DRAWING		DWG NO.	
					84058	