


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

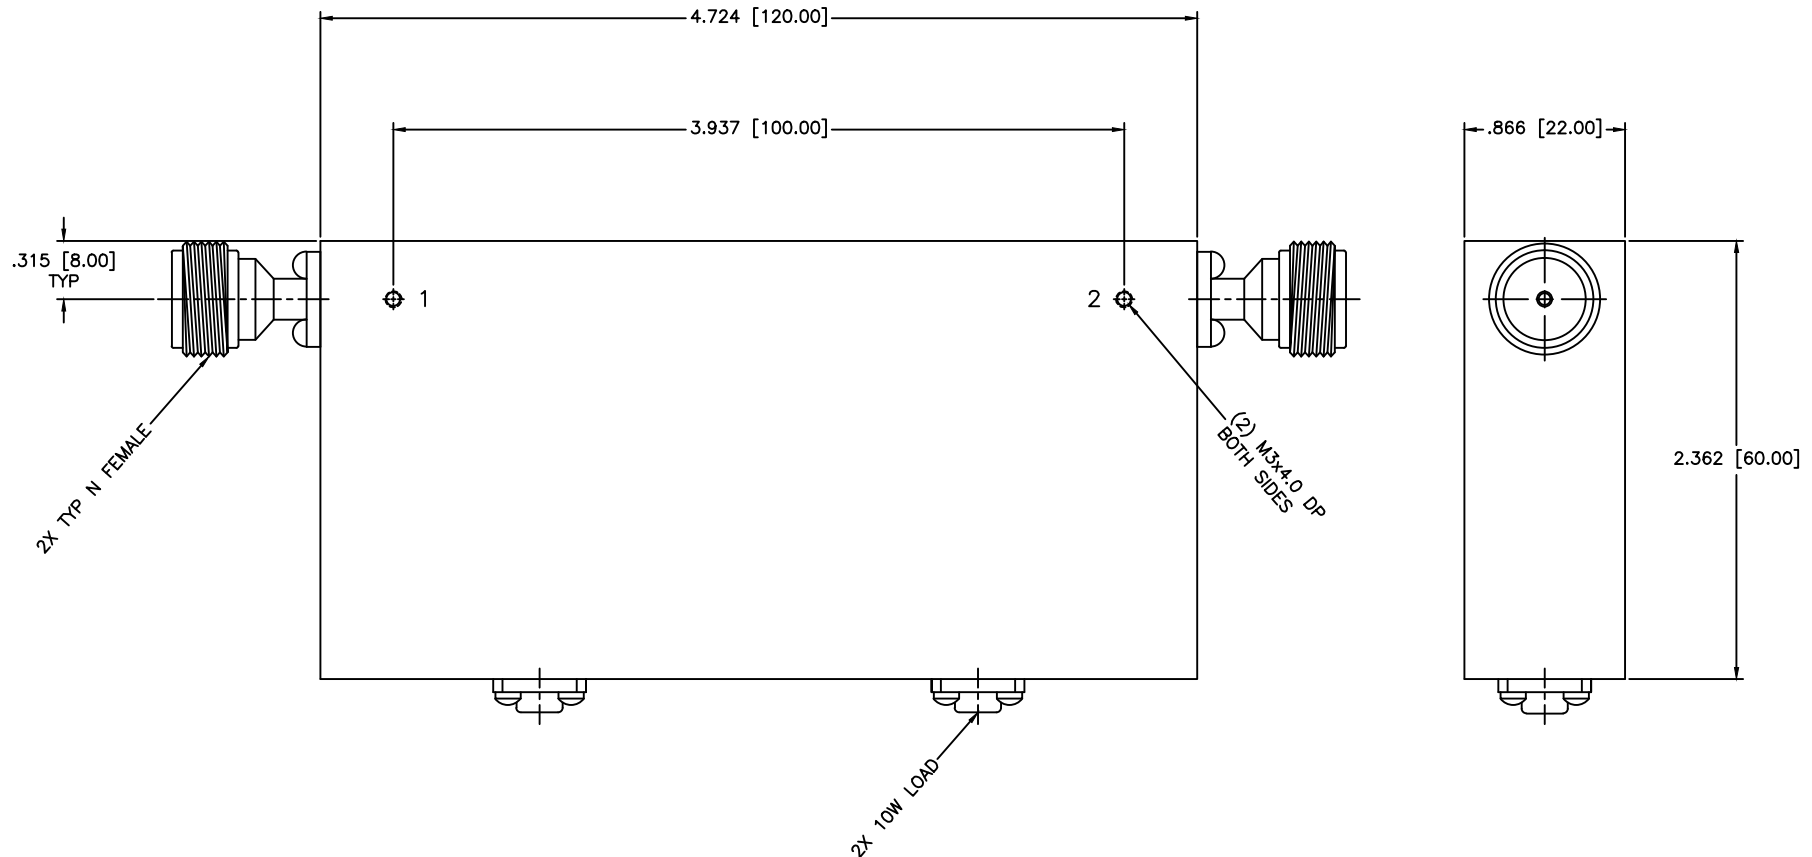

SPECIFICATIONS AT 25±5°C

FREQUENCY RANGE: 1.3–2.8 GHz

ISOALTION: 34dB MIN.

VSWR: 1.35:1 Max.

POWER: 10W REV, 50W FWD.

INSERTION LOSS: 1.2dB MAX.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°	DRAWING TITLE:		DUAL JUNCTION ISOLATOR	
DRAWN: Paiboon Luekhamhan		DATE: 11-09-2017	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:		ISDJ-12/NF
APPROVED: T. Nguyen		DATE: 11-09-2017	THIRD ANGLE PROJECTION	CAGE CODE:	SIZE: N/A	REV: N/A	DWG NO. 86696
				OD2L5	DO NOT SCALE THE DRAWING		