


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

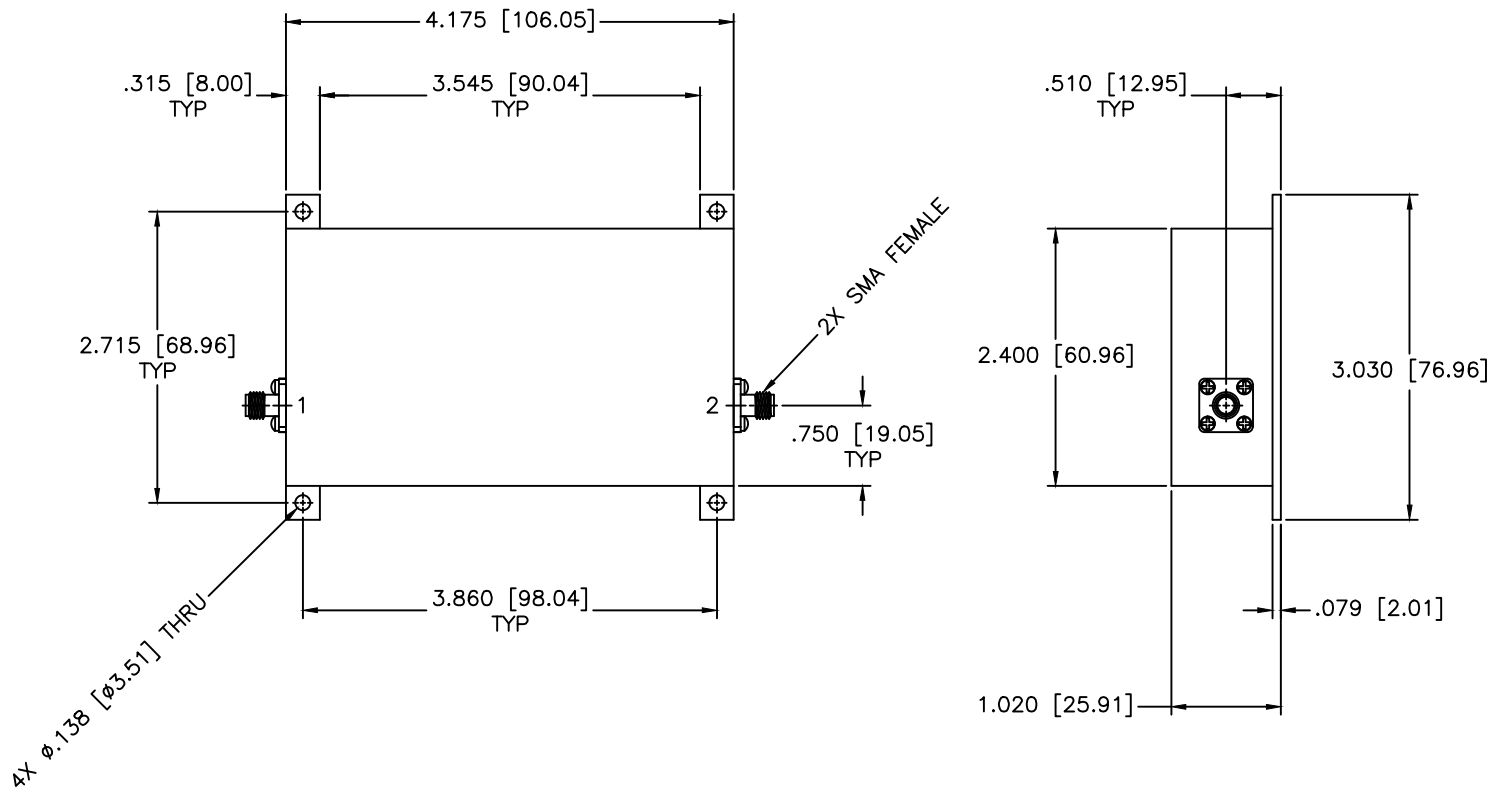

**SPECIFICATIONS**

FREQUENCY RANGE: 225-400 MHz  
 REVERSE ISOLATION: 35dB Min.  
 VSWR: 1.40:1 Max.  
 FORWARD POWER: 80W  
 INSERTION LOSS: 2.0dB Max.  
 OPERATING TEMPERATURE: -20°C to +56°C

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://www.mcli.com		SCALE: N/A
UNLESS OTHERWISE SPECIFIED:		TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .015 ANGLE: ± 1/2°		DRAWING TITLE: <b>DUAL JUNCTION COAXIAL ISOLATOR</b>		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 08-08-2011		PART NO.: ISJ-7		
APPROVED: T. Nguyen		DATE: 08-08-2011		CAGE CODE: OD2L5		SIZE: N/A
				DO NOT SCALE THE DRAWING		DWG NO.: 85814