
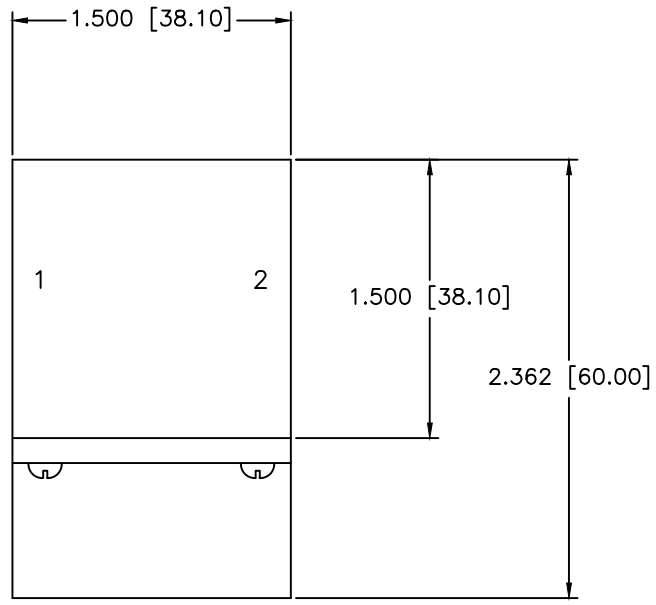


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

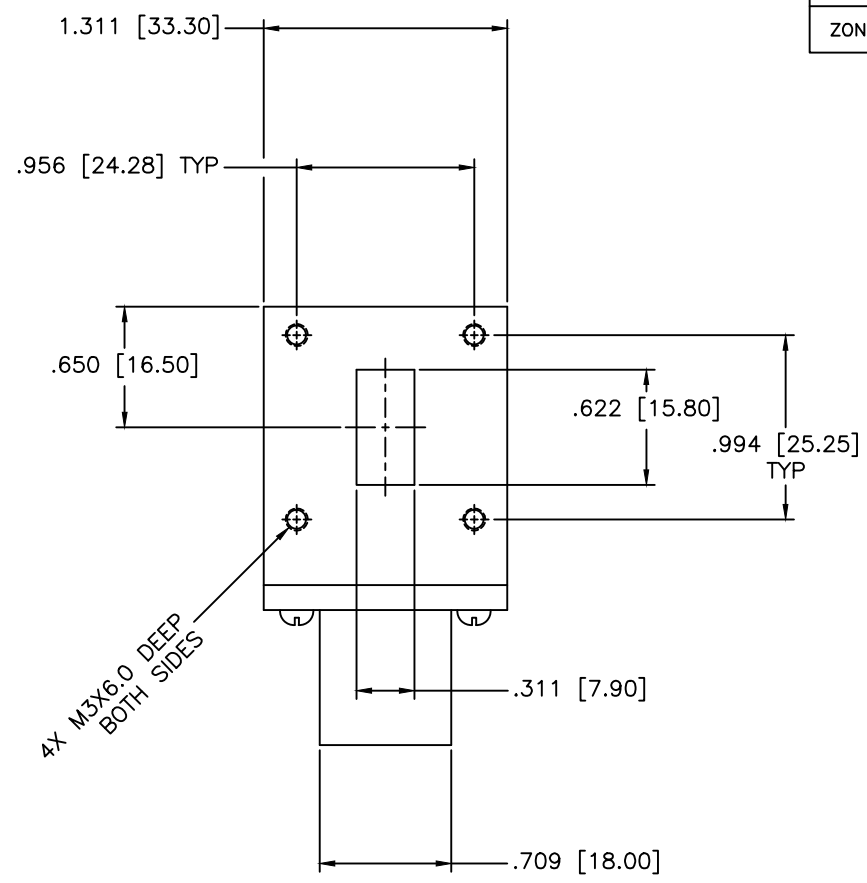

SPECIFICATIONS

FREQUENCY RANGE: 17-18 GHz
 EIA DESIGN (1-2): WR62
 VSWR: 1.20:1 Max.
 INSERTION LOSS: 0.30dB Max.
 ISOLATION: 21dB Max.
 POWER: 3W Average, 250W Peak
 OPERATING TEMPERATURE: -30°C to +70°C

MATERIAL:	
DRAWN: Paiboon	DATE: 12-11-2018
APPROVED: T. Nguyen	DATE: 12-11-2018

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) CHAMBER: ± .001[0.05] DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: WR62 WAVEGUIDE ISOLATOR		PART NO. ISW-35	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO. 86789

