


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

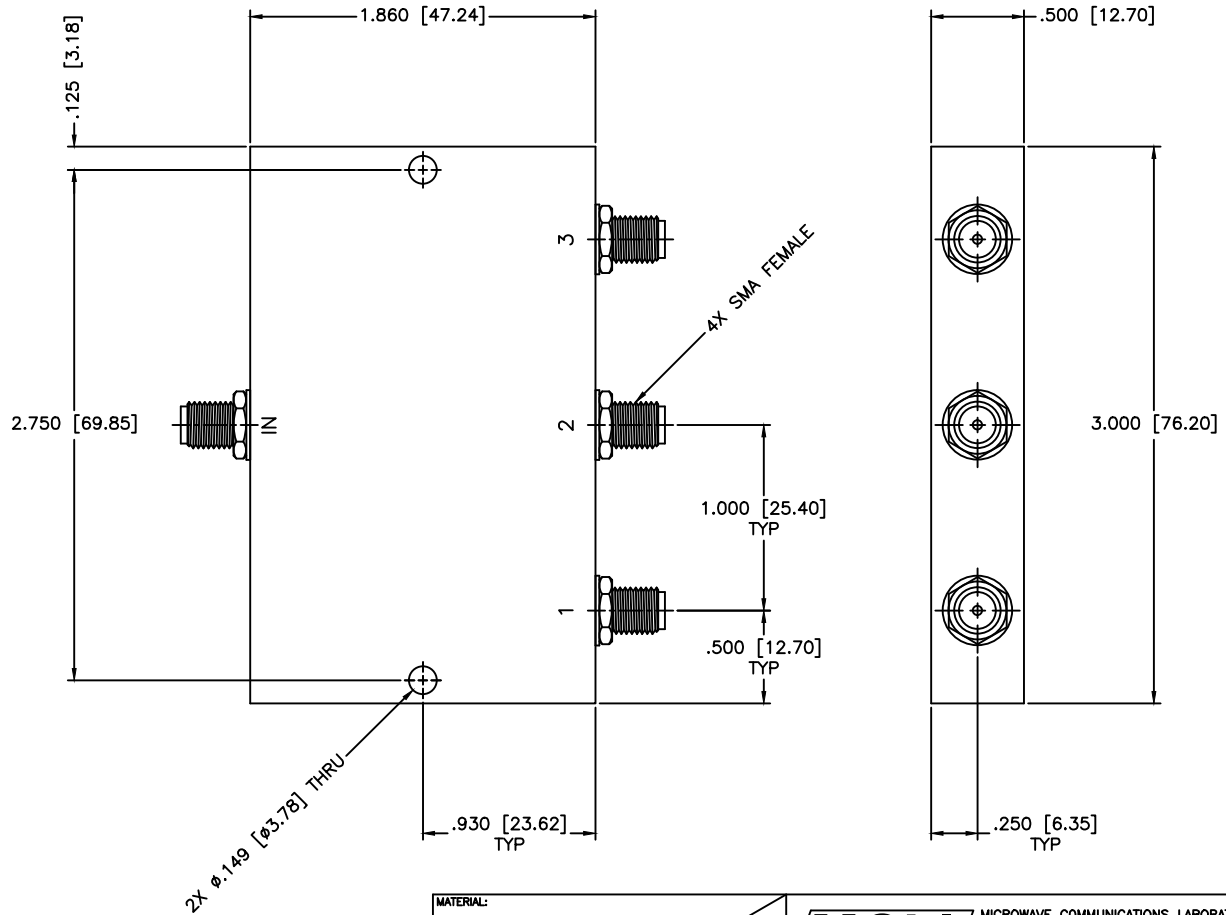

SPECIFICATIONS @ +25°C
 Frequency Range: 0.2–800 MHz
 Isolation: 23dB Typ.
 VSWR In/Out: 1.30:1/1.20:1 Typ.
 Insertion Loss: 1.10dB Typ.
 Amplitude Balance: ±0.3dB Typ.
 Phase Balance: ±3 Deg. Typ.
 Impedance: 50 Ohm
 Operating Temperature: -40°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 05-21-2009
APPROVED: T. Nguyen	DATE: 05-21-2009

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	3-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	PL3-12	
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	A	N/A	84506	
DO NOT SCALE THE DRAWING				

