


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

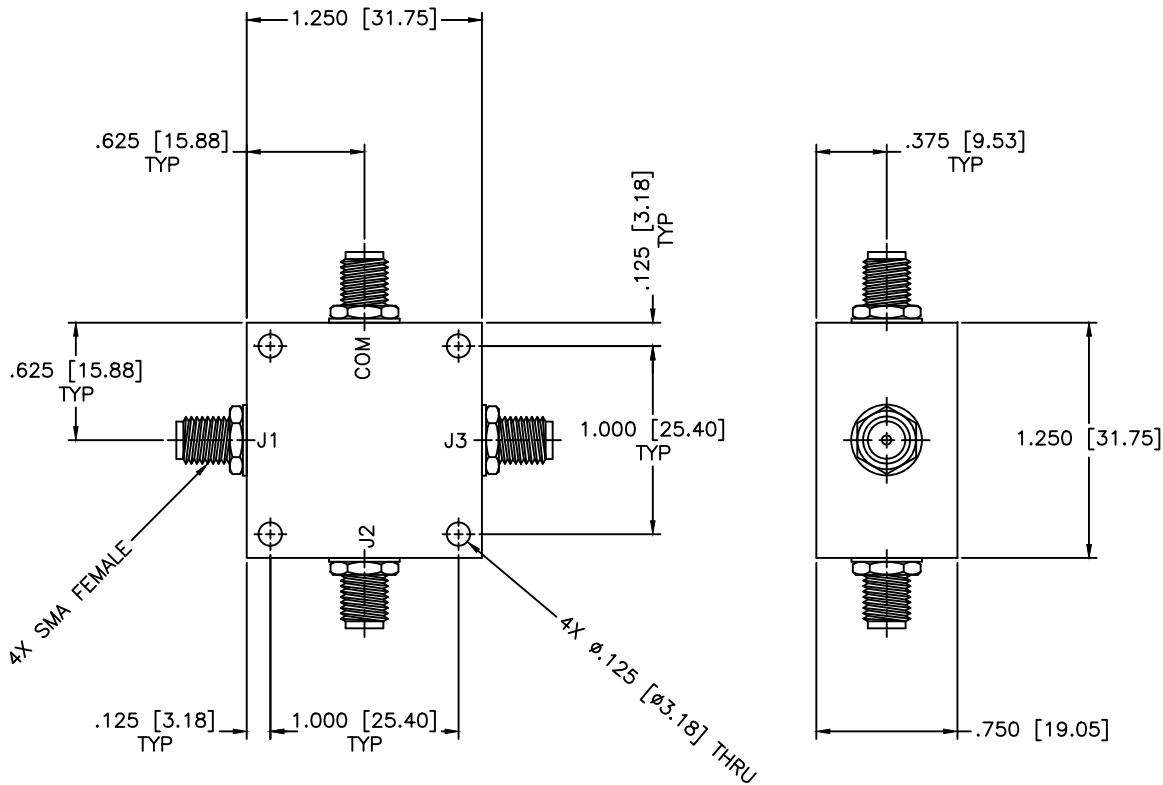

SPECIFICATIONS

Frequency Range: 50–1500 MHz
 Insertion Loss: 1.5dB Max.
 Isolation: 20dB Min.
 VSWR: 1.30:1 Max.
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±6 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997
APPROVED: T. Nguyen	DATE: 10-22-1997

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
3-WAY POWER DIVIDER

PART NO.
PL3-7

PROSECUTORY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)
 THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: **A** REV: **N/A**
 DO NOT SCALE THE DRAWING

DWG NO.
80139

SCALE: **N/A**
 SHEET: **N/A**