


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

4X ϕ .125 [3.18] THRU

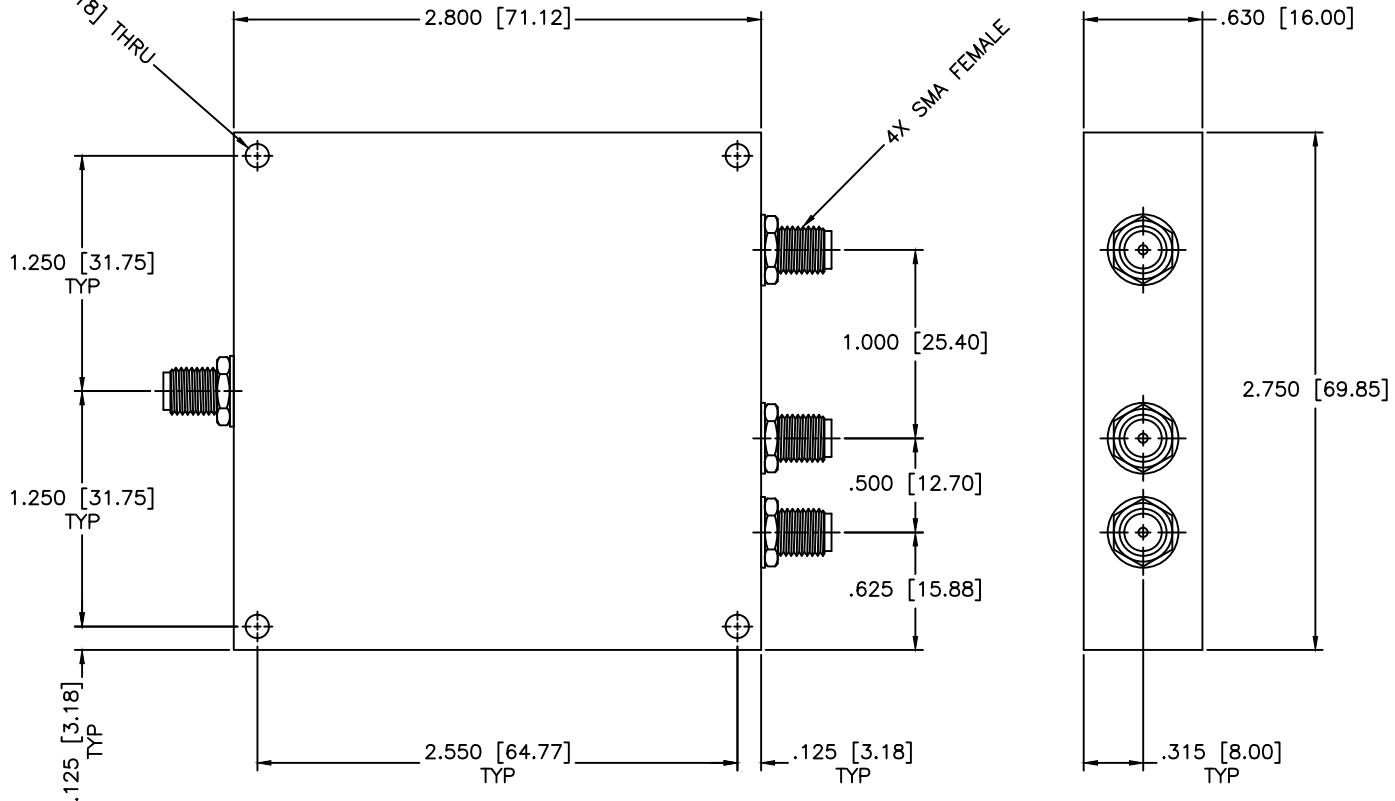

SPECIFICATIONS

- Frequency Range: 700–2400 MHz
- Isolation: 17dB Min.
- VSWR: 1.15:1 Max.
- Insertion Loss: 1.2dB Max.
- Amplitude Balance: ± 0.9 dB Max.
- Phase Balance: ± 8 Deg. Max.
- Operating Temperature: -54°C to $+85^{\circ}\text{C}$
- Input Power: 1 Watt Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997
APPROVED: T. Nguyen	DATE: 10-22-1997



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 544-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.005$
ANGLE: $\pm 1/2^{\circ}$

DRAWING TITLE:
3-WAY POWER DIVIDER

PART NO.
PL3-8

THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: A	REV: N/A
DO NOT SCALE THE DRAWING	

DWG NO.
80140