
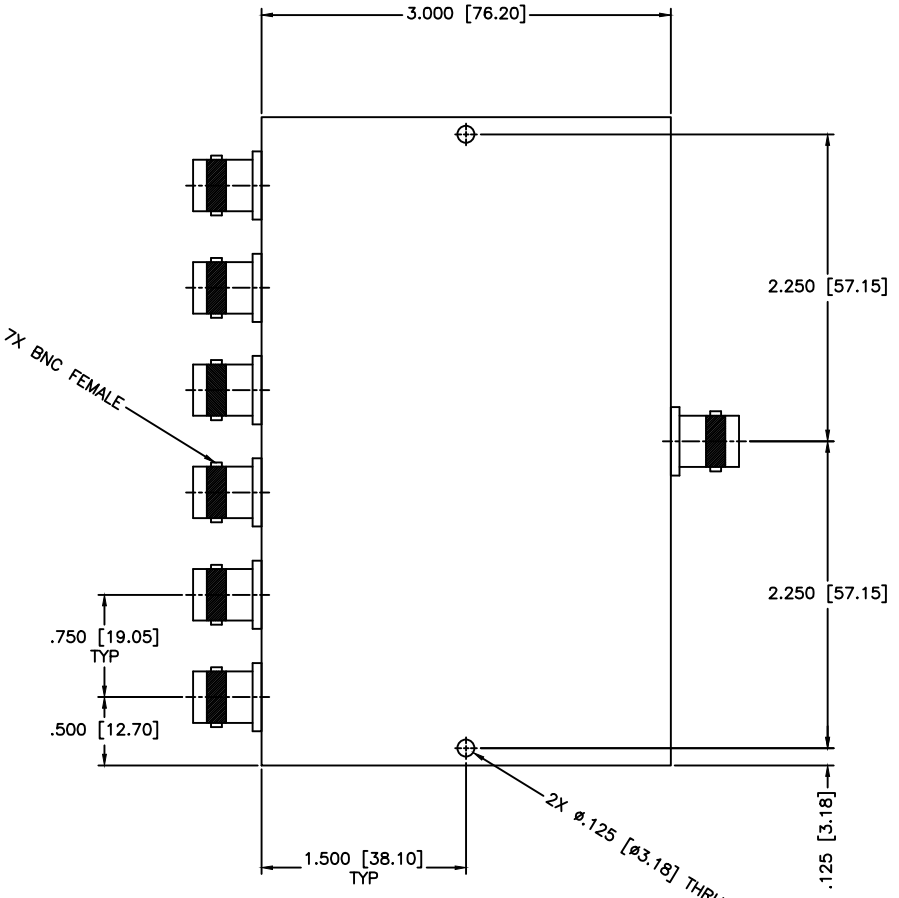


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

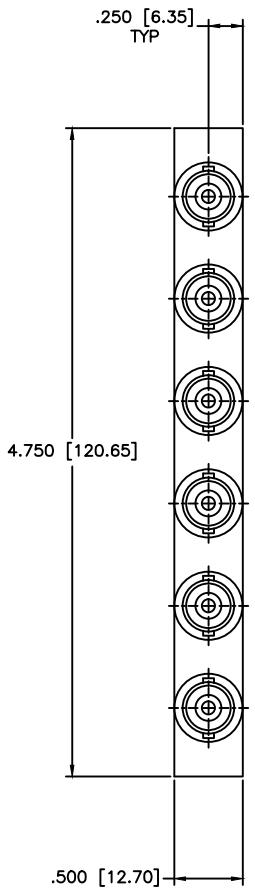

7X BNC FEMALE

SPECIFICATIONS
 FREQUENCY RANGE: 10–500 MHz
 INSERTION LOSS: 2.0dB Max.
 VSWR: 1.50:1 Max.
 ISOLATION: 22dB Min.
 AMPLITUDE BALANCE: 0.4dB Max.
 PHASE BALANCE: ±5 Deg. Max.
 POWER: 1 Watt Max.
 IMPEDANCE: 75 OHMS

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		6-WAY POWER DIVIDER			
DRAWN: Paiboon Luekhamhan		DATE: 07-18-2006		PART NO. PL6-11-B-75			
APPROVED: T. Nguyen		DATE: 07-18-2006		CAGE CODE: OD2L5		SIZE: A	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		REV: A		DWG NO. 82531	
				DO NOT SCALE THE DRAWING			