


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

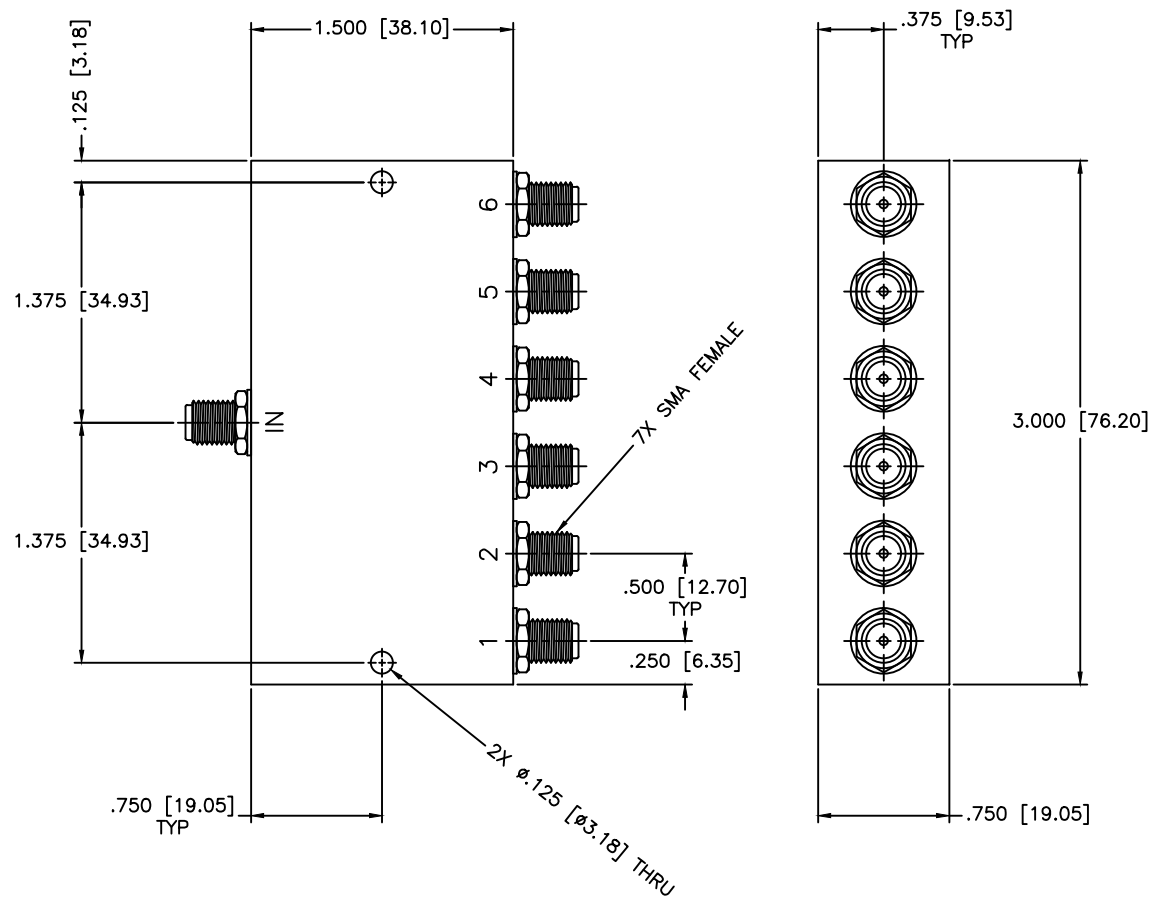

SPECIFICATIONS

Frequency Range: 5–1000 MHz
 Isolation: 18dB Min.
 Insertion Loss: 2.5dB Max.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±10 Deg. Max.
 VSWR: 1.60:1 Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 6-WAY POWER DIVIDERS
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO: PL6-3		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 10-30-1997	APPROVED: T. Nguyen DATE: 10-30-1997	CAGE CODE: 0D2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO: 80215